



Guidelines for stormwater runoff modelling in the Auckland Region

April 1999 TP 108

Prepared for Auckland Regional Council by Beca Carter Hollings & Ferner Ltd

CONTENTS

GLOSSARY	ii
DEFINITION OF SYMBOLS	iii
1. INTRODUCTION	1
1.1 Model Overview	1
1.2 Limits of Application	3
2. RAINFALL	4
2.1 Temporal Pattern	4
2.2 Design Rainfall Depth	4
2.3 Areal Reduction Factors	5
3. RAINFALL LOSSES	5
3.1 Rainfall-Runoff Curves	6
3.2 Curve Numbers	7
4. RUNOFF	11
4.1 Unit Hydrograph	11
4.2 Time of Concentration	12
5. WORKED EXAMPLE	14
5.1 Catchment Details	14
5.2 Rainfall	15
5.3 Rainfall Losses	15
5.4 Time of Concentration	15
5.5 Model Input Parameters	16
5.6 Flow Results	20
6. GRAPHICAL METHOD FOR PEAK FLOW RATE	21
6.1 Introduction	21
6.2 Method	21
6.3 Worked Example	23
7. REFERENCES	26
Appendix A - Design rainfall maps	
Appendix B - SCS Guidelines for Curve Numbers	
Appendix C - Calculation Worksheets	

Glossary

Antecedent ground condition	Ground moisture condition preceding a storm event
Average recurrence interval (ARI)	Average period between exceedences of a given flow rate or rainfall
ARC	Auckland Regional Council
Areal reduction factor	Used to apply point rainfall estimates to large catchments
Channelisation factor	Used to reduce catchment response time to allow for higher velocities in engineered channels
Cover type	Landuse factor, eg: vegetation, bare soil, sealed pavement
Curve number	Defines the shape of the rainfall-runoff relationship and varies from 0 (no runoff) to 100 (complete runoff)
Dimensionless unit hydrograph	Hydrograph produced by a unit depth of rain excess falling uniformly in time and space over a unit area catchment
Heterogeneous catchment	Non-homogeneous catchment, eg: containing significant impervious areas draining by a separate piped network
Homogeneous catchment	A catchment where all areas drain through common flow paths
Hydrograph	Graph illustrating the variation of flow with time
Hydrological condition	Factor based on combination of parameters affecting catchment infiltration and runoff (vegetation density, surface roughness)
Hydrological soil group	Soil classification (A, B, C, or D) according to infiltration rate, where A is very high infiltration and D is very poor infiltration
Initial abstraction	Rainfall losses occurring before runoff begins (includes storage in depressions, interception by vegetation, evaporation, and infiltration)
Lumped catchment	A catchment modelled as a single surface collecting rainfall, draining directly through a single outlet
Potential soil storage	Maximum water storage capacity of a soil
Rainfall-runoff curves	A family of curves developed by the SCS relating cumulative runoff to cumulative rainfall
SCS	U.S. Department of Agriculture, Soil Conservation Service (now known as the Natural Resources Conservation Service)

Soil treatment	Factor describing management of agricultural lands (eg: tillage, terracing)
TR55	SCS Technical Release No. 55, "Urban Hydrology for Small Watersheds", June 1986
Temporal rainfall pattern	Variation of rainfall intensity with time through a storm
Time of concentration	Time for a water particle to travel from the hydraulically most distant point of a catchment to the outlet

Definition of Symbols

A	km ²	Catchment area
C	-	Channelisation factor
c*	-	Dimensionless runoff index
CN	-	Runoff curve number
I	mm/hr	Rainfall intensity
I ₂₄	mm/hr	24 hr average rainfall intensity
I _a	mm	Initial rainfall abstraction
k	-	Hydrograph number
L	km	Catchment length, measured along the main channel to the top of the catchment
P	mm	Rainfall depth
P ₂₄	mm	24 hr rainfall depth
Q	mm	Runoff depth
q*	m ³ /s/km ² /mm	Specific peak flow rate
q _p	m ³ /s	Peak flow rate
S	mm	Potential soil storage
S _c	-	Catchment slope calculated by equal-area method
t _c	hrs	Catchment time of concentration
t _p	hrs	Unit hydrograph time to peak
V	m ³	Runoff volume

1. Introduction

These guidelines present a recommended method for the application of the U.S. Soil Conservation Service¹ rainfall-runoff model to catchments in the Auckland Region. They are based largely on Technical Release No. 55 (TR55) prepared by the U.S. Soil Conservation Service (SCS, 1986).

The Soil Conservation Service (SCS) model has been selected for stormwater management design in the Auckland Region on the basis of an evaluation against gauged catchments (BCHF, 1999a, 1999b, 1999c). Those reports provide the background to the selection, calibration and validation of the method. Streamflow data from the gauged catchments have been used to select input parameters for the model (soil classifications, times of concentration, etc.) and to validate the model.

The model is recommended for use in stormwater management design in the Auckland Region. It has been designed as a standard tool that will provide consistent results from different users. It is suitable for:

- assessing the effects of landuse change,
- modelling both frequent and extreme events,
- applying to distributed (a network of sub-catchments) or lumped catchments
- and simulating natural systems as well as engineered systems (such as pipe networks).

The model can be applied using a number of available software packages to predict runoff volumes, flow rates, and the timing of peak flows. Peak flow rates can also be estimated using an alternative graphical method.

1.1 Model Overview

Key features of the stormwater runoff model are illustrated in Figure 1.1 and described below:

- Design 24 hour rainfall depths are provided in the form of rainfall maps covering the Auckland Region.
- A standard 24 hour temporal rainfall pattern, having peak rainfall intensity at mid-duration. Shorter duration rainfall bursts with a range of durations from 10 minutes to 24 hours are nested within the 24 hour temporal pattern.
- Runoff depth is calculated using SCS rainfall-runoff curves, with curve numbers determined from the SCS guidelines according to classifications assigned to Auckland soil types.

¹ now known as the Natural Resources Conservation Service, part of the U.S. Department of Agriculture.

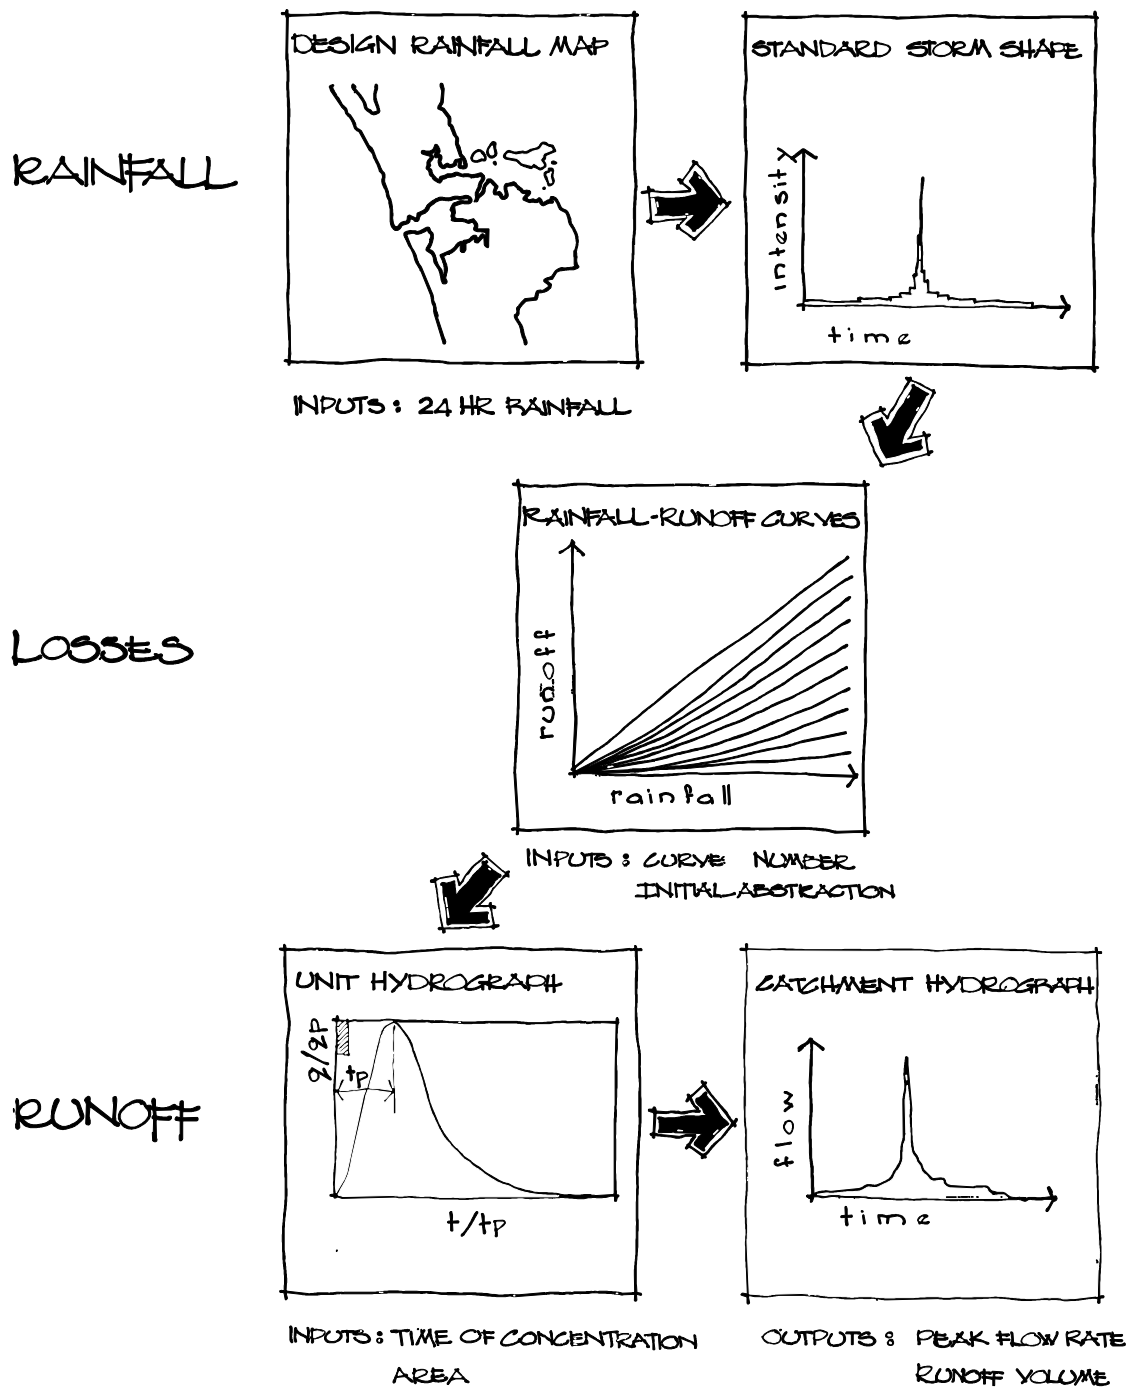


Figure 1.1 - Process diagram for the Stormwater Model

- Runoff hydrograph is calculated using the standard SCS synthetic unit hydrograph.

- Time of concentration is estimated using an empirical lag equation derived from a regression analysis of data from the Auckland Region.
- Separate analysis of pervious and impervious components of urban catchments.
- Effects of development on runoff depth are predicted using the standard SCS guidelines. Effects on catchment time response are allowed for using a channelisation factor and runoff parameter in the time of concentration relationship.

1.2 Limits of Application

- The model has been validated for relatively steep catchments in the Auckland Region, of up to 12 km² in size, with little hydraulic storage. For catchments with significant natural or engineered storage, separate hydraulic modelling of those areas will be necessary.
- The temporal rainfall pattern was derived statistically from rain gauge data representative of the Auckland Region and is appropriate for use within the Region.
- Rainfall loss and runoff timing parameters have been validated for ‘clayey’ (weathered mudstone and sandstone) and ‘volcanic’ (granular loams, and loams underlain by fractured basalt) soil types. Other soil types should be modelled by interpolating the soil classification.
- The model is applicable to both rural and urban (or mixed) catchments. Model parameters have been validated for pasture, row crops and typical urban land cover. Parameters for other land cover types (eg: forest or scrub) have been provided based on the standard Soil Conservation Service (SCS, 1986) guidelines.
- The model has been prepared as a standard tool for converting a design rainfall depth into a design runoff event of the same exceedence frequency. Validation of the model against six gauged Auckland catchments gave a standard error of 21% for all average recurrence intervals (ARI). For ARI of 2 to 100 years, the model can be expected to be within $\pm 25\%$ at a confidence level of 90 percent. This level of accuracy is good for a regionally-calibrated model, for which average errors of 25% to 70% are typical (IEA, 1987).
- The model accuracy for historical flood events simulated from historical storms will be dependent on the antecedent ground conditions and spatial rainfall variation. Antecedent ground conditions are variable, depending on the season and the timing of the storm within the sequence of storms. If this type of information is required, it is recommended to re-calibrate the model runoff parameters (ie: curve numbers) from nearby gauged catchments for the particular storm and to estimate the spatial rainfall distribution from nearby rain gauges.

2. Rainfall

The design rainfall event is calculated from a standard 24 hour temporal pattern and an estimate of the design 24 hour rainfall depth.

2.1 Temporal Pattern

The temporal pattern of the 24 hour design storm is shown in Figure 2.1. It was derived from an analysis of depth-duration-frequency data from long-term rainfall records representative of the Auckland Region (BCHF, 1999c). Design rainfall bursts with a range of durations up to 24 hours were nested within a 24 hour storm, which was then normalised by the 24 hour rainfall depth.

The design storm indices, presented in terms of normalised rainfall intensity (I/I_{24}), are presented in Table 2.1.

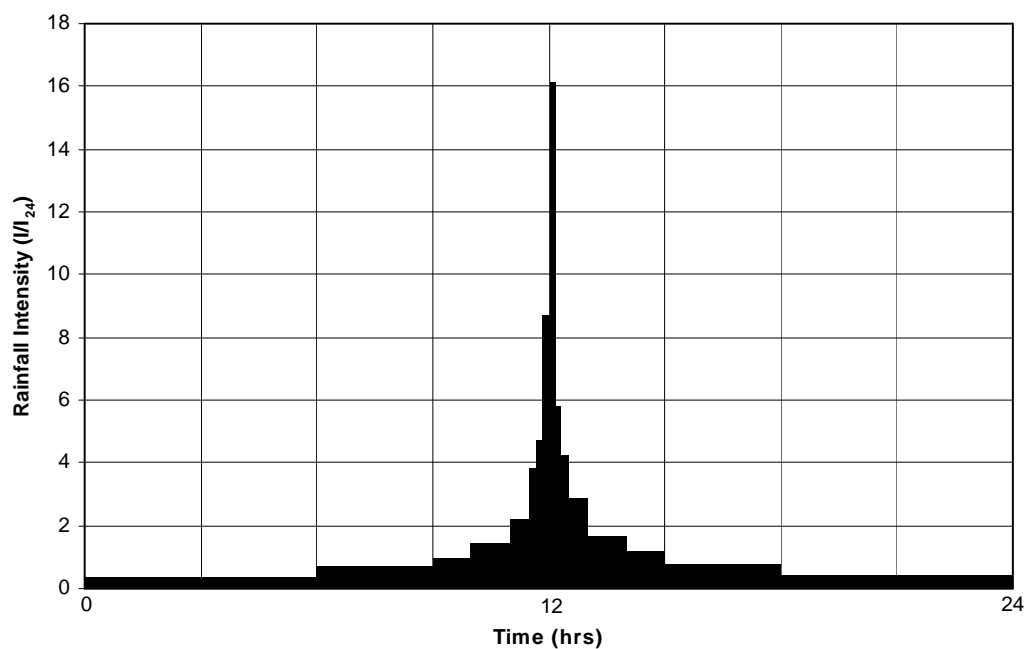


Figure 2.1 - Auckland Region 24 hour Design Storm

2.2 Design Rainfall Depth

The 24 hour rainfall depth should be obtained either from the design rainfall maps presented in Appendix A or from catchment-specific data if a suitable long term record is available. Contour maps of rainfall depth are presented for average recurrence intervals (ARI) of 2, 5, 10, 20, 50 and 100 years based on an analysis of rainfall gauge data across the region (BCHF, 1999c). Rainfall depths for other ARI within this range can be estimated by interpolating between maps.

Time (hrs:mins)	Time Interval (min)	Normalised Rainfall Intensity (I/I₂₄)
0:00 -	360	0.34
6:00 -	180	0.74
9:00 -	60	0.96
10:00 -	60	1.4
11:00 -	30	2.2
11:30 -	10	3.8
11:40 -	10	4.8
11:50 -	10	8.7
12:00 -	10	16.2
12:10 -	10	5.9
12:20 -	10	4.2
12:30 -	30	2.9
13:00 -	60	1.7
14:00 -	60	1.2
15:00 -	180	0.75
18:00 - 24:00	360	0.40

2.3 Areal Reduction Factors

Areal reduction factors are used to apply point estimates of rainfall to large catchments. Areal reduction factors (ARF) should be used with the SCS method if it is applied to catchments larger than 10 km² in size. The use of the SCS method on large catchments has not been validated in this study and validation of model performance against field data will be necessary. In the first instance, it is recommended that the ARF presented in TP19 (ARC, 1992) be used. These were based largely on a study by Tomlinson (1980) and are shown in Table 2.2. For convenience, it is suggested that an ARF value is selected from Table 2.2 according to the catchment area and time of concentration and this factor is applied to the 24 hour rainfall depth input to the model.

Area (km ²)	Time of Concentration (hrs)						
	0.5	1	2	3	6	12	24
≤10	1.0	1.0	1.0	1.0	1.0	1.0	1.0
20	0.90	0.91	0.93	0.94	0.95	0.96	0.97
50	0.72	0.75	0.82	0.86	0.92	0.94	0.96
100	0.71	0.74	0.79	0.83	0.86	0.89	0.90
200	0.70	0.72	0.75	0.79	0.82	0.85	0.86
500	0.68	0.70	0.72	0.74	0.76	0.79	0.81

3. Rainfall Losses

3.1 Rainfall-Runoff Curves

The SCS rainfall-runoff curves are used to describe rainfall losses. A family of curves relating cumulative runoff to cumulative rainfall were derived by the SCS according to the following equation:

$$Q = \frac{(P - Ia)^2}{(P - Ia) + S} \quad (3.1)$$

where:

Q = runoff depth (mm)

P = rainfall depth (mm)

S = potential maximum retention after runoff begins (mm)

Ia = initial abstraction (mm)

The initial abstraction is defined as all losses occurring before runoff begins. It includes depression storage, interception by vegetation, evaporation, and infiltration. The SCS guidelines (SCS, 1986) suggested that initial abstraction be related to the soil storage parameter according to the empirical equation, $Ia = 0.2 S$. Data from Auckland catchments with a wide range of soil types indicate that constant initial abstraction depths are more appropriate. The following values have been derived from the calibration and should be used for pervious and impervious areas:

	Pervious areas	Impervious areas
Ia (mm)	5	0

The soil storage parameter is related to soil and landuse conditions of the catchment through the curve number, CN:

$$S = \left(\frac{1000}{CN} - 10 \right) 25.4 \quad (mm) \quad (3.2)$$

CN ranges from 0 for zero runoff, to 100 for total runoff. The family of rainfall-runoff curves is presented in Figure 3.1 for $Ia = 0$ and 5 mm.

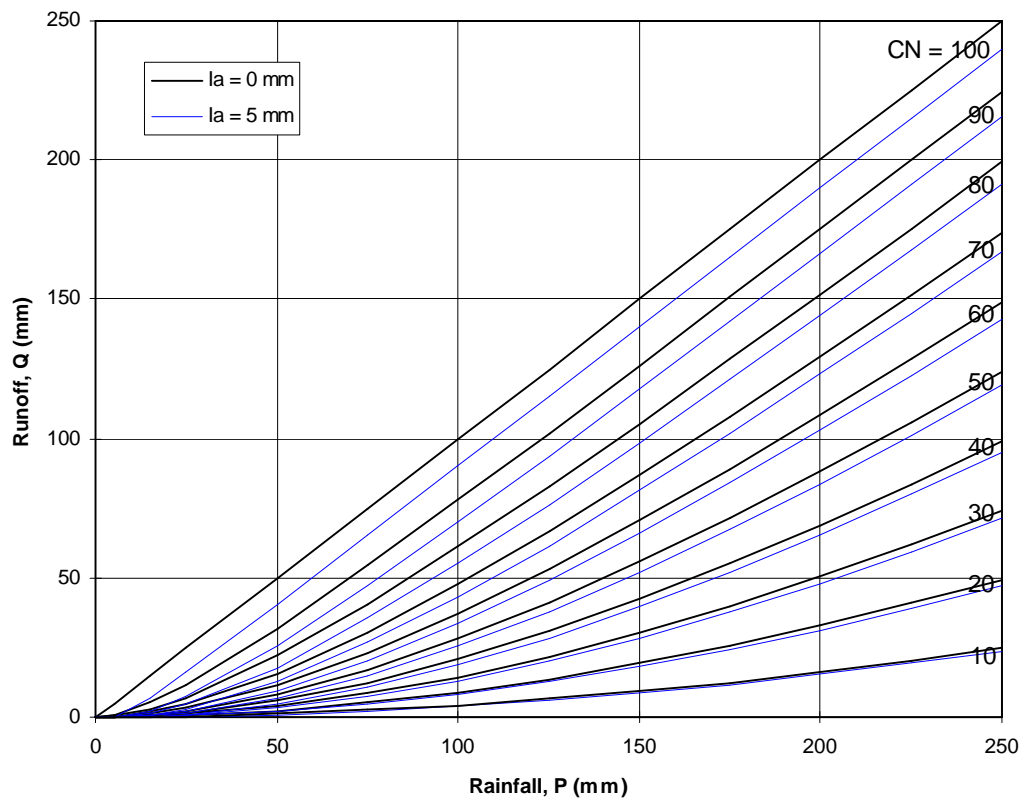


Figure 3.1 - Rainfall-runoff curves

3.2 Curve Numbers

The SCS guidelines (SCS, 1986) suggest that the major factors determining the curve number (CN) are the hydrological soil group, cover type, soil treatment, hydrological condition, and antecedent ground condition. Table 2-2 from the SCS guidelines presents curve numbers for urban and rural catchments with a range of these soil and landuse factors. Curve numbers for catchments in the Auckland Region should be selected using Table 2-2 (included in Appendix B) according to the guidelines presented below.

Runoff from catchments with a mix of soil or land use types can be modelled using an area-weighted curve number provided that the catchment is homogeneous. A homogeneous catchment is defined as a catchment where all areas drain through common flow paths. Where a catchment contains a significant impervious component connected to a piped network, the catchment should be considered heterogeneous. Heterogeneous catchments should be modelled by division into separate homogeneous sub-catchments, connected by hydraulic elements. The weighted curve number for a homogeneous catchment should be calculated as:

$$CN = \frac{\sum CN_i A_i}{A_{tot}} \quad (3.3)$$

Hydrological Soil Groups

The SCS hydrological soil groups are described as:

Group A soils have low runoff potential and high infiltration rates even when thoroughly wetted. They consist chiefly of deep, well to excessively drained sands or gravels and have a high rate of water transmission (greater than 8 mm/hr).

Group B soils have moderate infiltration rates when thoroughly wetted and consist chiefly of moderately deep to deep, moderately well to well drained soils with moderately fine to moderately coarse textures. These soils have a moderate rate of water transmission (4 to 8 mm/hr).

Group C soils have low infiltration rates when thoroughly wetted and consist chiefly of soils with a layer that impedes downward movement of water and soils with moderately fine to fine texture. These soils have a low rate of water transmission (1 to 4 mm/hr).

Group D soils have high runoff potential. They have very low infiltration rates when thoroughly wetted and consist chiefly of clay soils with a high swelling potential, soils with a permanent high water table, soils with a claypan or clay layer at or near the surface, and shallow soils over nearly impervious material. These soils have a very low rate of water transmission (0 to 1 mm/hr).

On the basis of validation against gauged catchments in the Region, the following Hydrological Soil Groups should be used:

Table 3.2 - Hydrological Soil Classifications for prevalent Auckland Soils	
Auckland Soil	SCS Hydrological Soil Group
Weathered mudstone and sandstone (Waitemata and Onerahi Series)	Group C
Alluvial sediments	Group B
Granular volcanic loam (ash, tuff, scoria)	Group A
Granular volcanic loam underlain by free-draining basalt	use CN = 17 for all pervious areas

Curve numbers for other soil types can be interpolated from the above classifications.

Land Use

Curve numbers should be selected based on soil type and land use based on SCS Table 2-2 (Appendix A). Land use type should be assessed by field reconnaissance, aerial

photographs, or land use maps. Land use factors incorporated into the SCS guidelines are:

- cover type (type of vegetation or use),
- soil treatment (management of cultivated lands),
- hydrological condition (density of vegetation, surface roughness, etc.)

For example, Table 3.3 below presents curve numbers taken from SCS Table 2-2 for some typical Auckland conditions.

Land use	Group A Soil (volcanic granular loam)	Group B Soil (alluvial)	Group C Soil (mudstone/san dstone)
Bush, humid-climate, not-grazed	30	55	70
Pasture, lightly grazed, good grass cover	39	61	74
Urban lawns	39	61	74
Crops, straight rows, minimal vegetative cover	72	81	88
Sealed roads, roofs	98	98	98

Impervious Areas

Impervious areas should be modelled with curve number of 98 and zero initial abstraction. Impervious areas within homogeneous catchments can be allowed for by using area-weighted values for CN and Ia. Impervious area should be measured from aerial photographs or by other methods (the percent impervious values in SCS Table 2-2a, Appendix B were not developed for Auckland conditions and should not be relied on). For homogeneous catchments:

$$CN = \frac{98A_{imperv} + CN_{perv}A_{perv}}{A_{tot}} \quad (3.4)$$

$$Ia = 5 \left(\frac{A_{perv}}{A_{tot}} \right) \quad (mm) \quad (3.5)$$

Catchments containing significant impervious areas connected directly to a reticulated stormwater system should not be modelled as homogeneous. The impervious-connected component will have a more rapid response time than the pervious component of the

catchment. This effect will be more marked in an urbanised catchment with volcanic soils. In such cases, a more realistic representation of the catchment may be obtained by modelling the connected-impervious areas and pervious areas as separate sub-catchments. Time response for the respective sub-catchments will be different and should be calculated according to the procedure in the following section. Any unconnected impervious areas (ie: those impervious areas draining onto pervious areas) should be included in the pervious sub-catchment.

4. Runoff

The runoff depth (calculated in Section 3) is converted to a catchment hydrograph using the dimensionless SCS unit hydrograph.

4.1 Unit Hydrograph

The SCS unit hydrograph was developed by averaging dimensionless unit hydrographs from a number of natural catchments with little or no storage (SCS, 1972). Individual hydrographs were made dimensionless by dividing by peak flow rate, q_p , and time to peak, t_p . The resulting dimensionless unit hydrograph is shown in Figure 4.1. The ordinates of this curve are presented in Table 4.1.

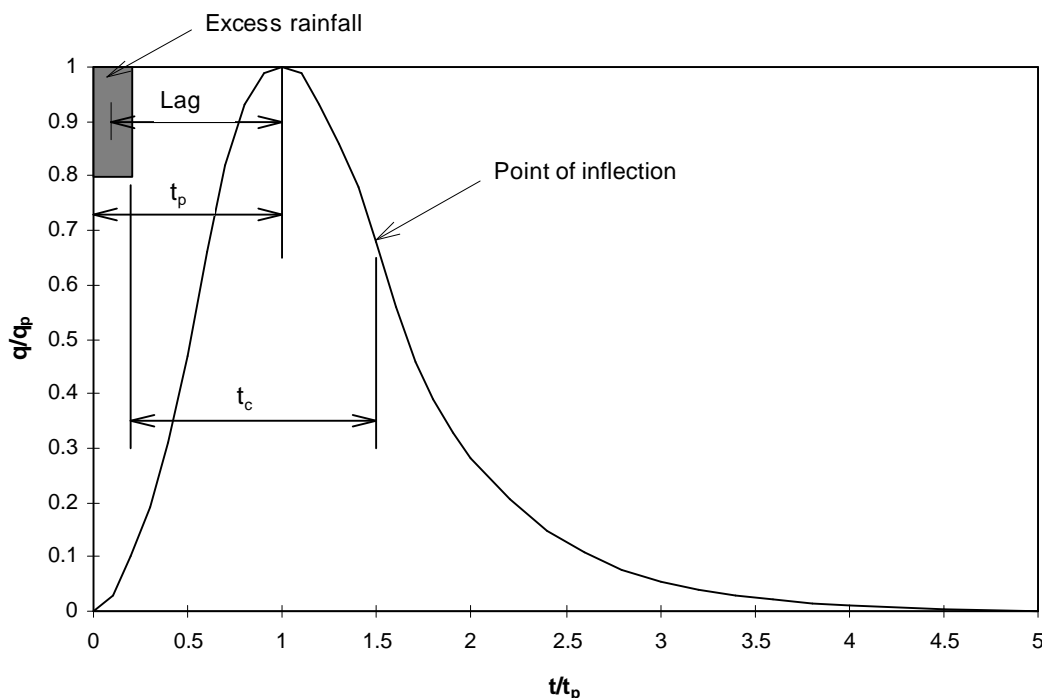


Figure 4.1 - SCS dimensionless unit hydrograph

The time to peak, t_p , of the SCS unit hydrograph is shorter than the catchment time of concentration, t_c . The SCS hydrograph is defined such that t_c is the time to the inflection point of the hydrograph recession limb. This leads to the following relationship (McCuen, 1998):

$$t_p = \frac{2}{3} t_c \quad (4.1)$$

Various software packages require the user to enter either t_c (eg: XP-SWMM32) or t_p (eg: HEC-HMS) in applying the SCS unit hydrograph.

Table 4.1 - SCS Unit Hydrograph ordinates

t/t_p	q/q_p	t/t_p	q/q_p	t/t_p	q/q_p
0	0	1.1	0.99	2.4	0.147
0.1	0.03	1.2	0.93	2.6	0.107
0.2	0.10	1.3	0.86	2.8	0.077
0.3	0.19	1.4	0.78	3.0	0.055
0.4	0.31	1.5	0.68	3.2	0.040
0.5	0.47	1.6	0.56	3.4	0.029
0.6	0.66	1.7	0.46	3.6	0.021
0.7	0.82	1.8	0.39	3.8	0.015
0.8	0.93	1.9	0.33	4.0	0.011
0.9	0.99	2.0	0.28	4.5	0.005
1.0	1.00	2.2	0.207	5.0	0

The unit hydrograph is applied to a specific catchment by factoring it by the time to peak t_p , and the peak flow rate. The peak flow rate q_{ip} , from a short duration rainfall burst is related to the runoff depth of the burst Q_i , by:

$$q_{ip} = k \frac{Q_i A}{t_p} \quad (4.2)$$

The standard SCS unit hydrograph predicts $\frac{3}{8}$ of the runoff depth under the rising limb. This corresponds to a coefficient in the above equation of $k = 2(\frac{3}{8}) = \frac{3}{4}$ if consistent units are used. A hydrograph number of $\frac{3}{4}$ is recommended for the Auckland Region.

4.2 Time of Concentration

The catchment time of concentration should be calculated using the following equation, derived from a regression analysis of Auckland catchments (BCHF, 1999c):

$$t_c = 0.14 C L^{0.66} \left(\frac{CN}{200 - CN} \right)^{-0.55} S_c^{-0.30} \quad (4.3)$$

where: t_c = time of concentration (hrs)

C = a channelisation factor allowing for effects of urbanisation on runoff velocities (from Table 4.2)

L = the catchment length (km) measured along the main channel

CN = the weighted SCS curve number of the catchment

S_c = the catchment slope (m/m) calculated using the equal-area method

Equation 4.3 was derived using data from 18 rural catchments in the Auckland Region. Table 4.1 presents factors to be used with this equation allowing for the higher flow velocities in urban stormwater systems.

Table 4.2 - Channelisation factors	
Piped stormwater system	C = 0.6
Engineered grass channels	C = 0.8

In applying Equation 4.3 a minimum value of 10 minutes (0.17 hrs) should be adopted.

Urban Catchments

The time of concentration equation presented above should be used for homogeneous catchments. Where an urban catchment is modelled as heterogeneous, times of concentration for the pervious and impervious components of the catchment should be calculated individually using Equation 4.3 with channelisation factors and values of CN appropriate to each component.

5. Worked Example


The use of the procedures given in the previous sections are illustrated by the following worked example. The objective is to compute runoff hydrographs from the existing urban Pakuranga catchment for the 2, 10, and 100 yr ARI events.

5.1 Catchment Details

Area = 312 ha

Length = 2.3 km (from point of interest to top of catchment)

Slope by equal area method:

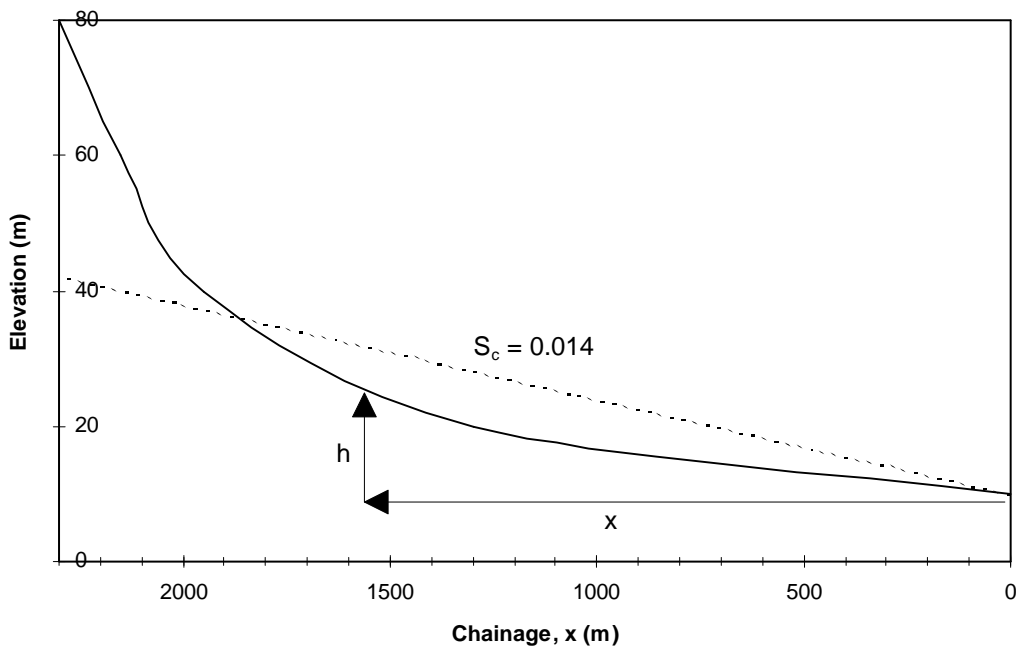

elevation (m)	h (m)	x (m)	Δx (m)	\bar{h} (m)	$\Delta A (= \bar{h} \cdot \Delta x)$ (m ²)
10	0	0			
20	10	1300	1300	5	6500
40	30	1950	650	20	13000
60	50	2150	200	40	8000
80	70	2300	150	60	9000
			2300		36500

$$\text{Slope, } S_c = \frac{2A}{L^2} = \frac{2(36500)}{2300^2} = 0.014$$

5.2 Rainfall

Design 24 hour rainfall depths are selected for the catchment location from the contour maps in Appendix A.

2 yr ARI,	$P_{24} = 75$ mm (from Figure A1)
10 yr ARI,	$P_{24} = 130$ mm (from Figure A3)
100 yr ARI,	$P_{24} = 200$ mm (from Figure A6)

5.3 Rainfall Losses

Separating the catchment into pervious and impervious components and using Worksheet 1 (see pages 16-17) to calculate CN and Ia leads to:

a. Pervious component:

(includes 166 ha pervious area and 20 ha unconnected impervious area)

Area	=	186 ha
CN	=	71.5
Ia	=	4.5 mm

b. Impervious component:

(impervious areas connected to the piped network only)

Area	=	126 ha
CN	=	98
Ia	=	0 mm

5.4 Time of Concentration

Using equation 4.3 in Worksheet 1 with a channelisation factor of 0.6 to reflect the predominantly piped catchment gives times of concentration of 0.72 and 0.54 hours for the pervious and impervious catchment components respectively.

Worksheet 1: Runoff Parameters and Time of Concentration

Project *Worked example* **By** *DAP* **Date** *18/12/98*

Location *Pakuranga* **Checked** *SJP* **Date** *18/12/98*

Circle one: Present **Developed** (Pervious & unconnected impervious)

1. Runoff Curve Number (CN) and Initial Abstraction (Ia)

Soil name and classification	Cover description (cover type, treatment, and hydrologic condition)	Curve Number CN*	Area	Product of CN × area
<i>Waitemata clay, Class C</i>	<i>Lawn, parks in good condition</i>	<i>74</i>	<i>139</i>	<i>10,286</i>
<i>Tuff, scoria, Class A</i>	<i>Parks, pasture in good condition</i>	<i>39</i>	<i>27</i>	<i>1,053</i>
-	<i>Unconnected impervious</i>	<i>98</i>	<i>20</i>	<i>1,960</i>
* from Table 3.3			Totals =	
			<i>186</i>	<i>13,299</i>

$$CN \text{ (weighted)} = \frac{\text{total product}}{\text{total area}} = \frac{13,299}{186} = 71.5$$

$$Ia \text{ (weighted)} = \frac{5 \times \text{pervious area}}{\text{total area}} = \frac{5 \times 166}{186} = 4.5 \text{ mm}$$

2. Time of Concentration

Channelisation factor $C = 0.6$ (from Table 4.2)

Catchment length $L = 2.3$ km (along drainage path)

Catchment slope $S_c = 0.014$ m/m (by equal area method)

$$\text{Runoff factor, } \frac{CN}{200 - CN} = \frac{71.5}{200 - 71.5} = 0.56$$

$$t_c = 0.14 C L^{0.66} \left(\frac{CN}{200 - CN} \right)^{-0.55} S_c^{-0.30}$$

$$= 0.14 \times 0.6 \times 2.3^{0.66} \times 0.56^{-0.55} \times 0.014^{-0.30} = 0.72 \text{ hrs}$$

$$\text{SCS Lag for HEC-HMS... } t_p = 2/3 t_c = 0.48 \text{ hrs}$$

Worksheet 1: Runoff Parameters and Time of Concentration

Project *Worked example* **By** *DAP* **Date** *18/12/98*

Location *Pakuranga* **Checked** *SJP* **Date** *18/12/98*

Circle one: Present Developed (*Connected impervious*)

1. Runoff Curve Number (CN) and Initial Abstraction (Ia)

Soil name and classification	Cover description (cover type, treatment, and hydrologic condition)	Curve Number CN*	Area	Product of CN × area
-	<i>Connected impervious</i>	98	126	12,348
* from Table 3.3			Totals =	126 12,348

$$CN \text{ (weighted)} = \frac{\text{total product}}{\text{total area}} = \frac{12,348}{126} = 98$$

$$Ia \text{ (weighted)} = \frac{5 \times \text{pervious area}}{\text{total area}} = \frac{5 \times 0}{126} = 0 \text{ mm}$$

2. Time of Concentration

Channelisation factor C = 0.6 (from Table 4.2)

Catchment length L = 2.3 km (along drainage path)

Catchment slope S_c = 0.014 m/m (by equal area method)

$$\text{Runoff factor, } \frac{CN}{200 - CN} = \frac{98}{200 - 98} = 0.96$$

$$t_c = 0.14 C L^{0.66} \left(\frac{CN}{200 - CN} \right)^{-0.55} S_c^{-0.30}$$

$$= 0.14 \times 0.6 \times 2.3^{0.66} \times 0.96^{-0.55} \times 0.014^{-0.30} = 0.54 \text{ hrs}$$

SCS Lag for HEC-HMS... t_p = 2/3 t_c = 0.36 hrs

5.5 Model Input Parameters

For this example, the above input data has been entered into the HEC-HMS computer package² to calculate the runoff hydrograph. In the HEC-HMS format, the catchment input data is as follows:

a. Pervious catchment

Sub-basin name: *Pakuranga-pervious*
Area: *1.86 km²*
Description: *Includes lawn, parks & unconnected impervious area*

Loss Rate:

Method: *SCS Curve No.*
Initial Loss: *4.5 mm*
% Impervious: *0 (Imperviousness has been allowed for using CN and Ia)*
SCS Curve No.: *71.5*

Transform:

Method: *SCS*
SCS Lag: *0.48 hours*
(In terms of the notation adopted in these guidelines, the 'SCS Lag' value required in HEC-HMS is t_p , where $t_p = 2/3 t_c$)

Baseflow Method:

Method: *No Baseflow*

b. Impervious catchment

Sub-basin name: *Pakuranga-impervious*
Area: *1.26 km²*
Description: *Impervious areas connected to piped network*

Loss Rate:

Method: *SCS Curve No.*
Initial Loss: *0 mm*
% Impervious: *0 (Imperviousness has been allowed for using CN and Ia)*
SCS Curve No.: *98*

Transform:


² HEC-HMS Ver 1.0 is available for no charge from:
Hydrologic Engineering Centre
609 Second St
Davis, CA 95616, U.S.A.
(530) 756-1104
<http://www.wrc-hec.usace.army.mil>

Method: *SCS*
SCS Lag: 0.36 hours

Baseflow Method:

Method: *No Baseflow*

Runoff flows from the two sub-catchments are combined in the model by reach elements leading from each sub-catchment to a single junction element, representing the catchment outlet (as shown below). The 24 hour design rainfall storm is entered into the model as rain gauge data. HEC-HMS documentation should be consulted for further details.

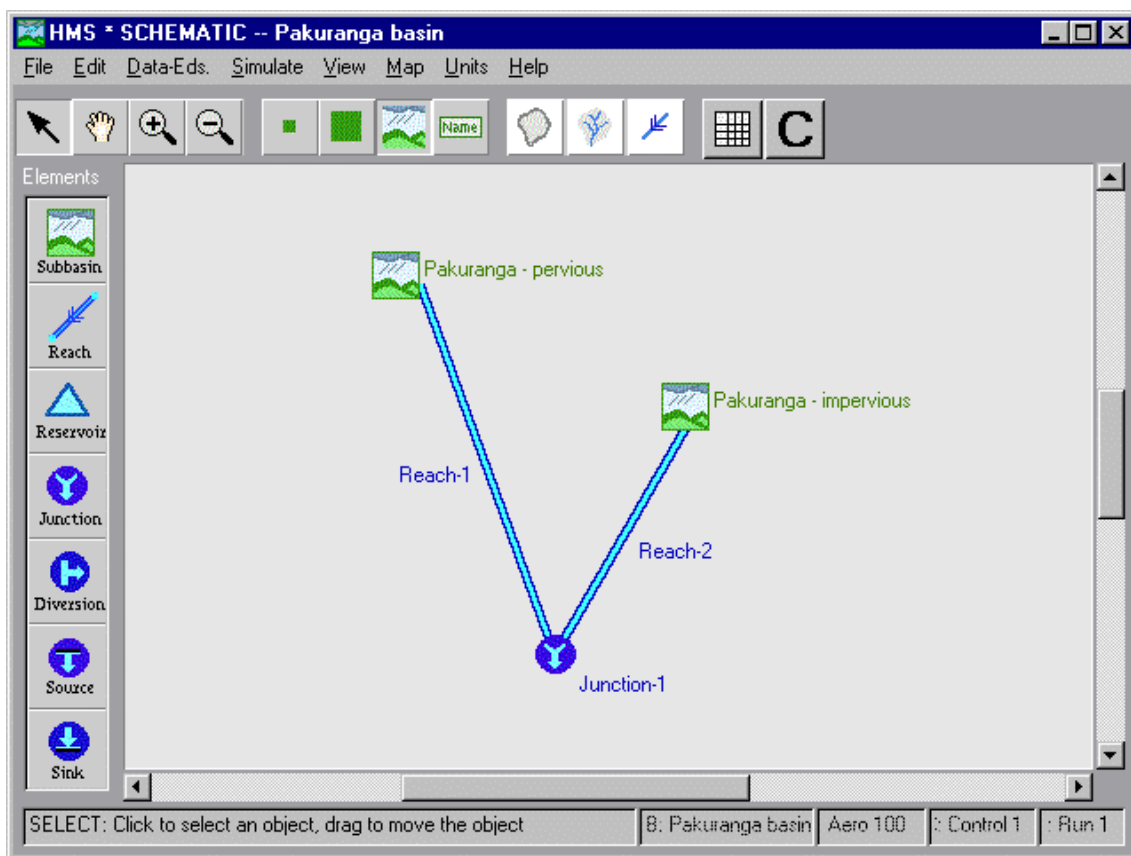


5.6 Flow Results

With the input data above, the HEC-HMS model gives the following runoff flows:

ARI (yrs)	2	10	100
Rainfall depth (mm)	75	130	200
Runoff depth (mm)	46	92	155
Time to peak (hrs:min)	12:28	12:29	12:29
Peak flow (m ³ /s)	15	31	52
<i>Peak flow from frequency analysis of flow record (m³/s)</i>	<i>12</i>	<i>31</i>	<i>54</i>

The predicted flow hydrograph for the 100 year ARI event is shown below:

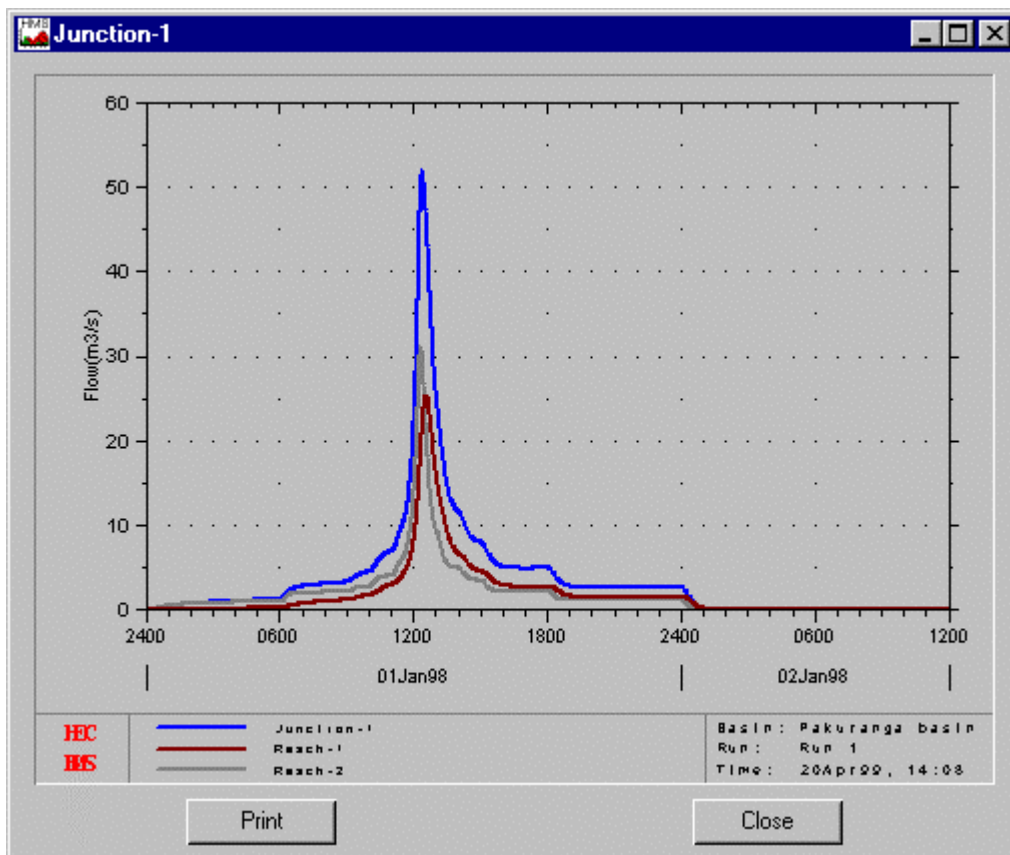

6. Graphical Method for Peak Flow Rate

6.1 Introduction

An alternative graphical method for calculating the peak flow rate from a homogeneous rural or urban catchment is presented in this section. This method does not require the use of a computer.

6.2 Method

The following equation is used to calculate the peak flow rate, q_p :

$$q_p = q^* A P_{24} \quad (5.1)$$

where:

q_p = peak flow rate (m^3/s)

q^* = specific peak flow rate $\left(\frac{\text{m}^3/\text{s}}{\text{km}^2 \text{ mm}} \right)$

P_{24} = 24 hour design rainfall depth (mm)

A = catchment area (km^2)

Values of the specific flow rate have been calculated using the model described in the previous sections and are presented as functions of a dimensionless runoff index c^* , in Figure 5.1.

The steps in calculating peak flow rate and runoff depth are as follows:

- Assemble catchment parameters: area A , slope S , length L , soil and land use types.
- Calculate the catchment curve number CN , initial abstraction I_a , and time of concentration t_c (using Worksheet 1).
- Calculate the soil storage S (using equation 3.2)
- Estimate the 24 hour design rainfall depth, P_{24} .
- Calculate the runoff index, $c^* = \frac{P_{24} - 2I_a}{P_{24} - 2I_a + 2S}$
- Estimate the specific peak flow rate q^* , from Figure 5.1.
- Calculate the peak flow rate q_p , using Equation 5.1.
- Calculate the runoff depth Q , using Equation 3.1.

This procedure has been set out in Worksheet 2 for convenience.

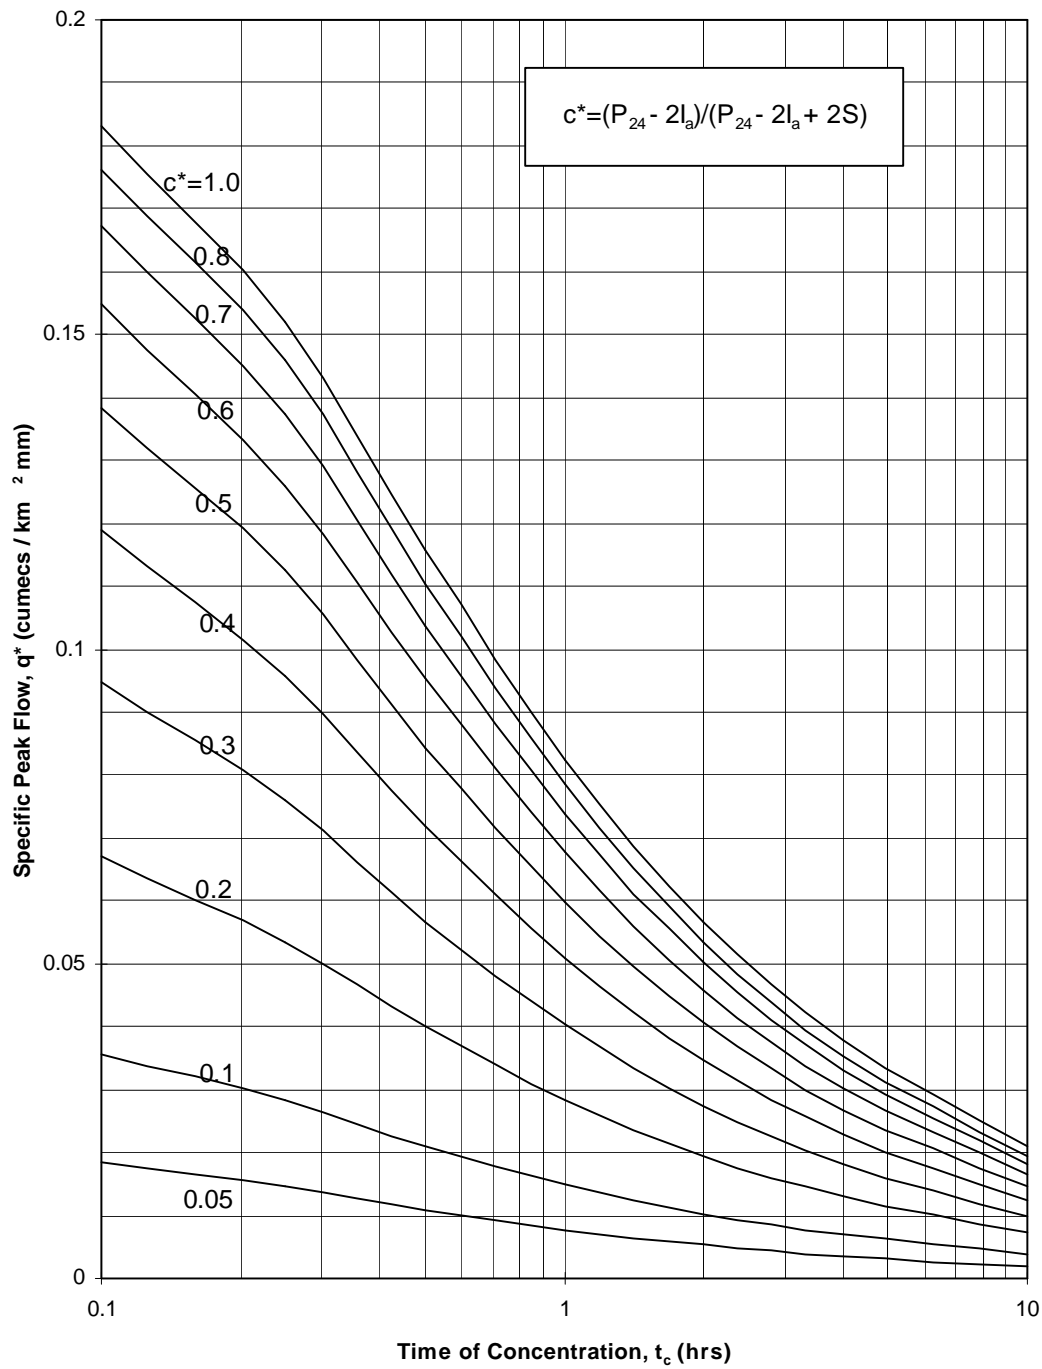


Figure 5.1 - Specific Peak Flow Rate

6.3 Worked Example

The application of the graphical method is demonstrated below as a worked example. The method has been applied to the urban Pakuranga catchment which was also used to demonstrate the application of the method on the HEC-HMS computer model.

The catchment is modelled as a homogeneous watershed in the graphical method and the resultant peak runoff rates are slightly higher than those from the computer model where the catchment was separated into pervious and impervious components. Predicted runoff volumes are slightly lower if the catchment is modelled as homogeneous.

Worksheet 2: Graphical Peak Flow Rate

Project *Worked example* **By** *DAP* **Date** *18/12/98*

Location *Pakuranga* **Checked** *SJP* **Date** *18/12/98*

Circle one: Present Developed (*Entire catchment, pervious & impervious*)

1. Data

Catchment area $A = 3.12 \text{ km}^2$

Runoff curve number $CN = 82$ (from Worksheet 1)

Initial abstraction $I_a = 2.7 \text{ mm}$ (from Worksheet 1)

Time of concentration $t_c = 0.64 \text{ hrs}$ (from Worksheet 1)

2. Calculate storage, $S = \left(\frac{1000}{CN} - 10\right)25.4 = 56 \text{ mm}$

3. Average recurrence interval, ARI (yr)

4. 24 hour rainfall depth, P_{24} (mm)

5. Compute $c^* = \frac{P_{24} - 2I_a}{P_{24} - 2I_a + 2S}$

6. Specific peak flow rate, q^*
(from figure 5.1)

7. Peak flow rate, $q_p = q^* A P_{24}$ (m^3/s)

8. Runoff depth, $Q_{24} = \frac{(P_{24} - I_a)^2}{(P_{24} - I_a) + S}$ (mm)

9. Runoff volume, $V_{24} = 1000 \times Q_{24} A$
(m^3)

Storm #1	Storm #2	Storm #3
2	10	100
75	130	200
0.38	0.53	0.63
0.060	0.078	0.088
14	32	55
41	88	154
127,000	276,000	479,000

7. References

- ARC (1992) “Guidelines for the Estimation of Flood Flows in the Auckland Region”, prepared by Beca Carter Hollings & Ferner Ltd. for the Auckland Regional Council, Tech. Publ. No.19, Nov. 1992.
- BCHF (1999a) “Methods of Analysis for Stormwater Management Design: Review Stage”, prepared for Auckland Regional Council by Beca Carter Hollings & Ferner Ltd., April 1999.
- BCHF (1999b) “Methods of Analysis for Stormwater Management Design: Model Evaluation Stage”, prepared for Auckland Regional Council by Beca Carter Hollings & Ferner Ltd., April 1999.
- BCHF (1999c) “Methods of Analysis for Stormwater Management Design: Guidelines Preparation Stage”, prepared for Auckland Regional Council by Beca Carter Hollings & Ferner Ltd., April 1999.
- IEA (1987) “Australian Rainfall and Runoff”, D.H. Pilgrim ed., Institute of Engineers Australia publ.
- McCuen, R.H. (1998) “Hydrological Analysis and Design”, 2nd ed., Prentice Hall Publ., New Jersey.
- SCS (1986) “Urban Hydrology for Small Watersheds”, Technical Release No. 55, U.S. Department of Agriculture, Soil conservation Service, 2nd ed., June 1986.
- Tomlinson, A.I. (1980) “The Frequency of High Intensity Rainfalls in New Zealand: Part 1”, Water & Soil Publ. No. 19, 1980.

Appendix A - Design Rainfall Maps

Appendix B - SCS Guidelines for Runoff Curve Numbers

Table 2-2a.-Runoff curve numbers for urban areas¹ (SCS, 1986)

Cover description	Curve numbers for hydrologic soil group			
	A	B	C	D
Cover type and hydrologic condition	Average percent impervious area²			
Fully developed urban areas (vegetation established)				
Open space (lawns, parks, golf courses, cemeteries, etc.) ³ :				
Poor condition (grass cover < 50%)	68	79	86	89
Fair condition (grass cover 50% to 75%)	49	69	79	84
Good condition (grass cover > 75%)	39	61	74	80
Impervious areas:				
Paved parking lots, roofs, driveways, etc. (excluding right-of-way)				
	98	98	98	98
Streets and roads:				
Paved; curbs and storm sewers (excluding right-of-way)				
	98	98	98	98
Paved; open ditches (including right-of-way)				
	83	89	92	93
Gravel (including right-of-way)				
	76	85	89	91
Dirt (including right-of-way)				
	72	82	87	89
Western desert urban areas:				
Natural desert landscaping (pervious areas only) ⁴				
	63	77	85	88
Artificial desert landscaping (impervious weed barrier, desert shrub with 1- to 2-inch sand or gravel mulch and basin borders)				
	96	96	96	96
Urban districts:				
Commercial and business				
	85	89	92	95
Industrial				
	72	81	88	93
Residential districts by average lot size:				
1/8 acre or less (town houses)				
	65	77	85	92
1/4 acre				
	38	61	75	87
1/3 acre				
	30	57	72	86
1/2 acre				
	25	54	70	85
1 acre				
	20	51	68	84
2 acres				
	12	46	65	82
Developing urban areas				
Newly graded areas (pervious areas only, no vegetation) ⁵				
	77	86	91	94
Idle lands (CN's are determined using cover types similar to those in table 2-2c).				

¹ Average runoff condition, and Ia = 0.2S.

² The average percent impervious area shown was used to develop the composite CN's. Other assumptions are as follows: impervious areas are directly connected to the drainage system, impervious areas have a CN of 98, and pervious areas are considered equivalent to open space in good hydrologic condition. CN's for other combinations of conditions may be computed using figure 2-3 or 2-4.

³ CN's shown are equivalent to those of pasture. Composite CN's may be computed for other combinations of open space cover type.

⁴ Composite CN's for natural desert landscaping should be computed using figures 2-3 or 2-4 based on the impervious area percentage (CN = 98) and the pervious area CN. The pervious area CN's are assumed equivalent to desert shrub in poor hydrologic condition.

⁵ Composite CN's to use for the design of temporary measures during grading and construction should be computed using figure 2-3 or 2-4, based on the degree of development (impervious area percentage) and the CN's for the newly graded pervious areas.

Table 2-2b.-Runoff curve numbers for cultivated agricultural lands¹ (SCS, 1986)

Cover description		Hydrologic condition ³	Curve numbers for hydrologic soil group-			
Cover type	Treatment ²		A	B	C	D
Fallow	Bare soil		77	86	91	94
	Crop residue cover (CR)	Poor	76	85	90	93
Row crops	Straight row (SR)	Good	74	83	88	90
		Poor	72	81	88	91
	SR + CR	Good	67	78	85	89
		Poor	71	80	87	90
	Contoured (C)	Good	64	75	82	85
		Poor	70	79	84	88
	C + CR	Good	65	75	82	86
		Poor	69	78	83	87
	Contoured & terraced (C&T)	Good	64	74	81	85
		Poor	66	74	80	82
	C&T + CR	Good	62	71	78	81
		Poor	65	73	79	81
Small grain	SR	Good	61	70	77	80
		Poor	65	76	84	88
	SR + CR	Good	63	75	83	87
		Poor	64	75	83	86
	C	Good	60	72	80	84
		Poor	63	74	82	85
	C + CR	Good	61	73	81	84
		Poor	62	73	81	84
	C&T	Good	60	72	80	83
		Poor	61	72	79	82
	C&T + CR	Good	59	70	78	81
		Poor	60	71	78	81
Close-seeded or broadcast legumes or rotation meadow	SR	Good	58	69	77	80
		Poor	66	77	85	89
	C	Good	58	72	81	85
		Poor	64	75	83	85
	C&T	Good	55	69	78	83
		Poor	63	73	80	83
		Good	51	67	76	80

¹ Average runoff condition, and Ia = 0.2S.

² *Crop residue cover* applies only if residue is on at least 5% of the surface throughout the year.

³ Hydrologic condition is based on combination of factors that affect infiltration and runoff, including (a) density and canopy of vegetative areas, (b) amount of year-round cover, (c) amount of grass or close-seeded legumes in rotations, (d) percent of residue cover on the land surface (good >_ 20%), and (e) degree of surface roughness.

Poor: Factors impair infiltration and tend to increase runoff.

Good: Factors encourage average and better than average infiltration and tend to decrease runoff.

Table 2-2c.-Runoff curve numbers for other agricultural lands¹ (SCS, 1986)

Cover description	Hydrologic condition	Curve numbers for hydrologic soil group-			
		A	B	C	D
Pasture, grassland, or range-continuous forage for grazing. ²	Poor	68	79	86	89
	Fair	49	69	79	84
	Good	39	61	74	80
Meadow-continuous grass, protected from grazing and generally mowed for hay.		30	58	71	78
Brush-brush-weed-grass mixture with brush the major element. ³	Poor	48	67	77	83
	Fair	35	56	70	77
	Good	⁴ 30	48	65	73
Woods-grass combination (orchard or tree farm). ⁵	Poor	57	73	82	86
	Fair	43	65	76	82
	Good	32	58	72	79
Woods. ⁶	Poor	45	66	77	83
	Fair	36	60	73	79
	Good	⁴ 30	55	70	77
Farmsteads-buildings, lanes, driveways, and surrounding lots.		59	74	82	86

¹ Average runoff condition, and Ia = 0.2S.

² *Poor*: <50% ground cover or heavily grazed with no mulch.

Fair: 50 to 75% ground cover and not heavily grazed.

Good: > 75% ground cover and lightly or only occasionally grazed.

³ *Poor*: <50% ground cover.

Fair: 50 to 75% ground cover.

Good: > 75% ground cover.

⁴ Actual curve number is less than 30; use CN = 30 for runoff computations.

⁵ CN's shown were computed for areas with 50% woods and 50% grass (pasture) cover. Other combinations of conditions may be computed from the CN's for woods and pasture.

⁶ *Poor*: Forest litter, small trees, and brush are destroyed by heavy grazing or regular burning.

Fair: Woods are grazed but not burned, and some forest litter covers the soil.

Good: Woods are protected from grazing, and litter and brush adequately cover the soil.

Table 2-2d.-Runoff curve numbers for arid and semi-arid rangelands¹ (SCS, 1986)

Cover description	Hydrologic condition ²	Curve numbers for hydrologic soil group-			
		A ³	B	C	D
Herbaceous-mixture of grass, weeds, and low-growing brush, with brush the minor element.	Poor		80	87	93
	Fair		71	81	89
	Good		62	74	85
Oak-aspen-mountain brush mixture of oak brush, aspen, mountain mahogany, bitter brush, maple, and other brush.	Poor		66	74	79
	Fair		48	57	63
	Good		30	41	48
Pinyon-juniper-pinyon, juniper, or both; grass understory.	Poor		75	85	89
	Fair		58	73	80
	Good		41	61	71
Sagebrush with grass understory.	Poor		67	80	85
	Fair		51	63	70
	Good		35	47	55
Desert shrub-major plants include saltbush, greasewood, creosote bush, black brush, bursage, palo verde, mesquite, and cactus.	Poor	63	77	85	88
	Fair	55	72	81	86
	Good	49	68	79	84

¹ Average runoff condition, and Ia = 0.2S. For range in humid regions, use table 2-2c.

² Poor: < 30% ground cover (litter, grass, and brush overstory).

Fair: 30 to 70% ground cover.

Good: >70% ground cover.

³ Curve numbers for group A have been developed only for desert shrub.

Appendix C - Calculation Worksheets

Worksheet 1: Runoff Parameters and Time of Concentration

Project _____ By _____ Date _____

Location _____ Checked _____ Date _____

Circle one: Present Developed _____

1. Runoff Curve Number (CN) and Initial Abstraction (Ia)

Soil name and classification	Cover description (cover type, treatment, and hydrologic condition)	Curve Number CN*	Area	Product of CN × area
* from Appendix B			Totals =	

$$CN \text{ (weighted)} = \frac{\text{total product}}{\text{total area}} = \frac{\quad}{\quad} = \quad$$

$$Ia \text{ (weighted)} = \frac{5 \times \text{pervious area}}{\text{total area}} = \frac{5 \times \quad}{\quad} = \quad \text{mm}$$

2. Time of Concentration

Channelisation factor C = _____ (from Table 4.2)

Catchment length L = _____ km (along drainage path)


Catchment slope S_c = _____ m/m (by equal area method)

$$\text{Runoff factor, } \frac{CN}{200 - CN} = \frac{\quad}{200 - \quad} = \quad$$

$$t_c = 0.14 C L^{0.66} \left(\frac{CN}{200 - CN} \right)^{-0.55} S_c^{-0.30}$$

$$= 0.14 \times \quad \times \quad^{0.66} \times \quad^{-0.55} \times \quad^{-0.30} = \quad \text{hrs}$$

SCS Lag for HEC-HMS... t_p = 2/3 t_c = _____ hrs

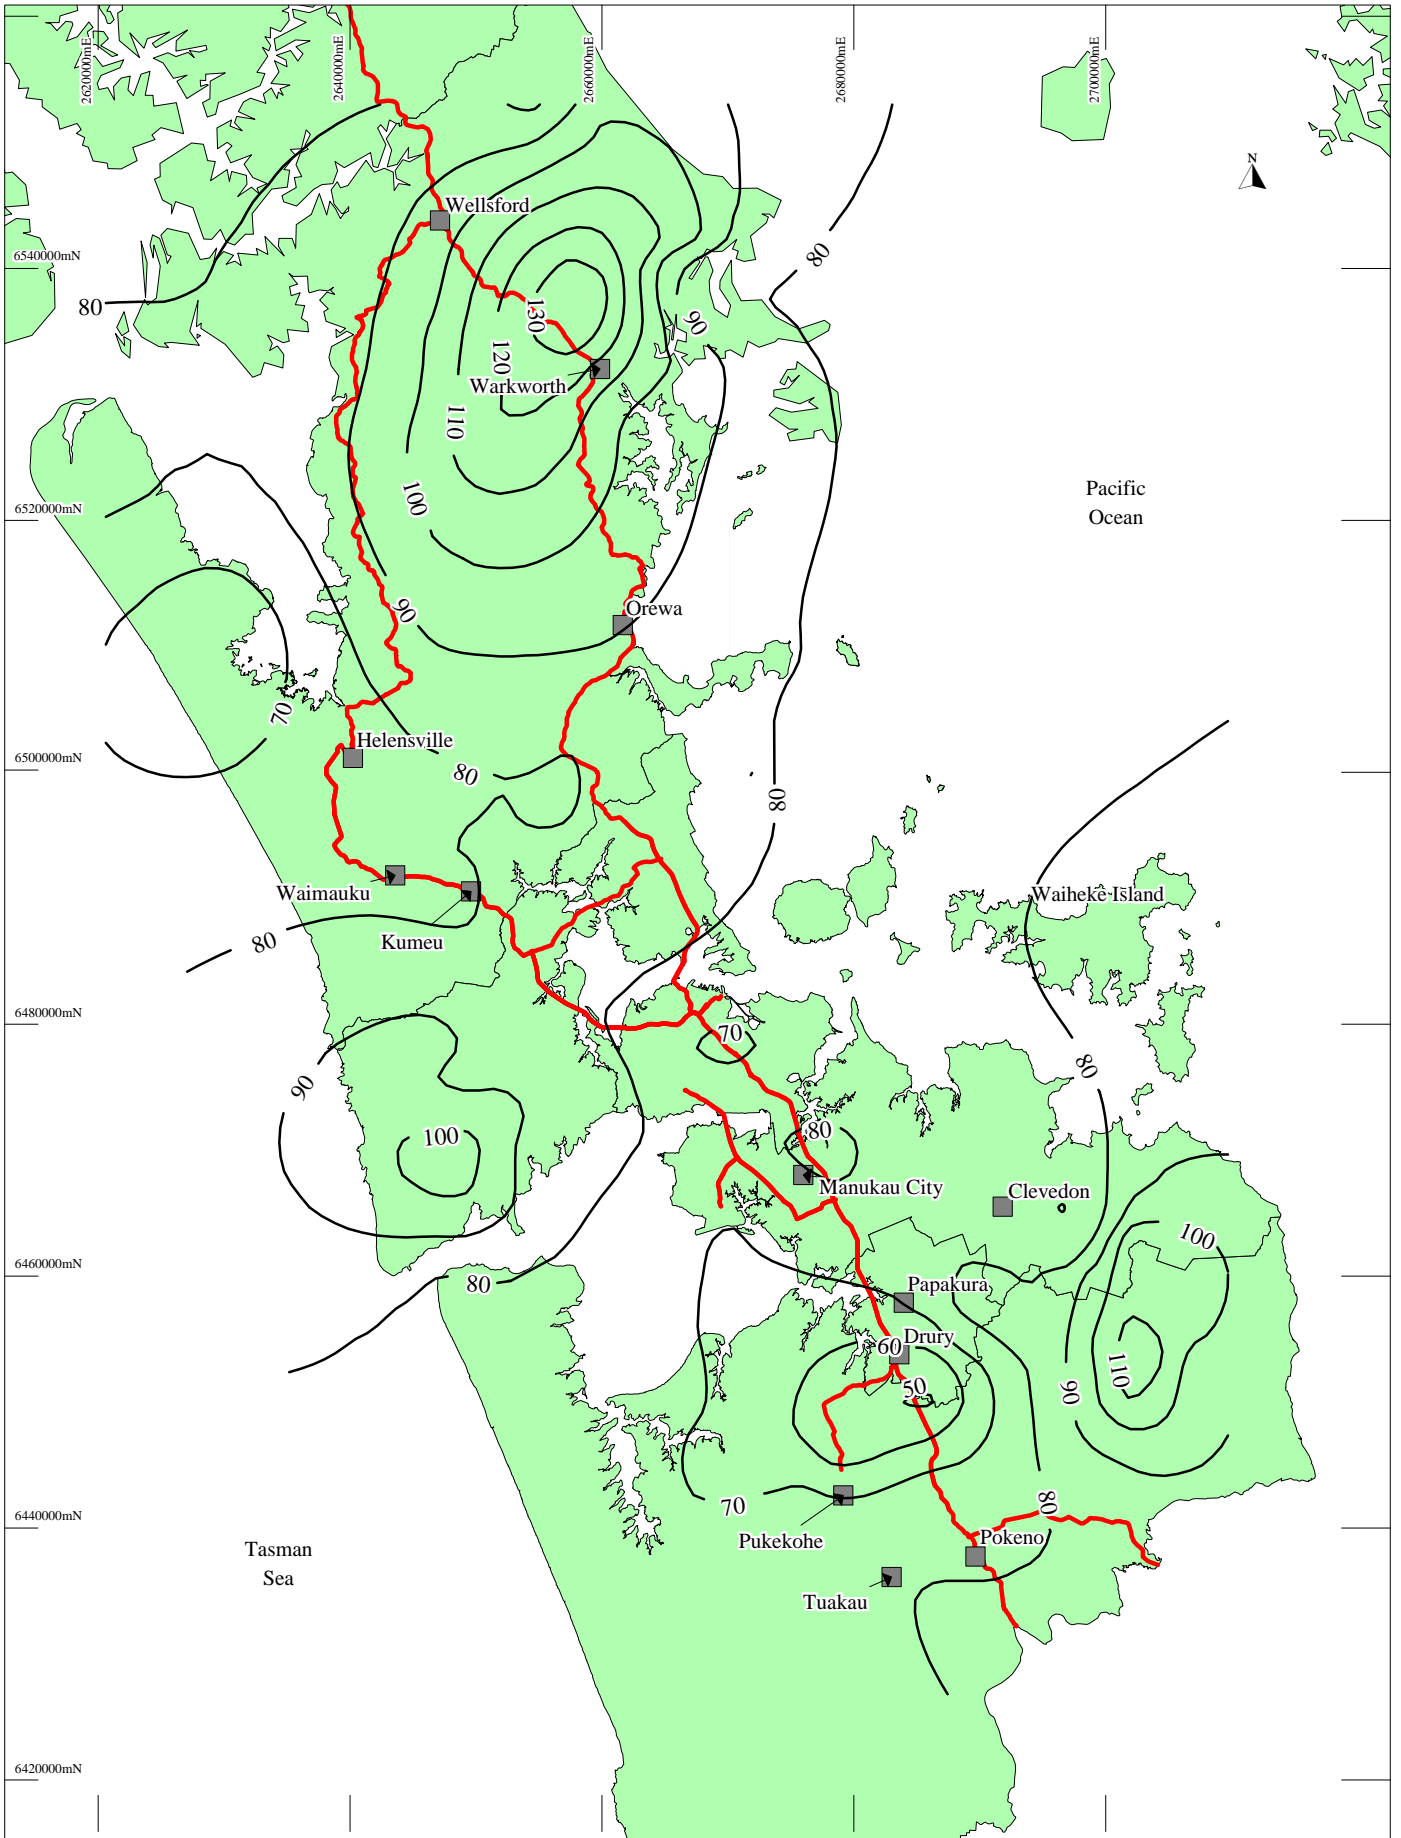

Workspace: N:(civil)\25\2507757\gis\mapinfo\wor\2year\wor Date: 25/08/1999

A




Auckland **Regional** Council

Legend: — 70 — Rainfall Contour (mm)
 — State Highways

Figure A.1
2 Year ARI
Daily Rainfall Depth

Scale: 1:600,000 (at A4)
 (Revised 25/08/1999)

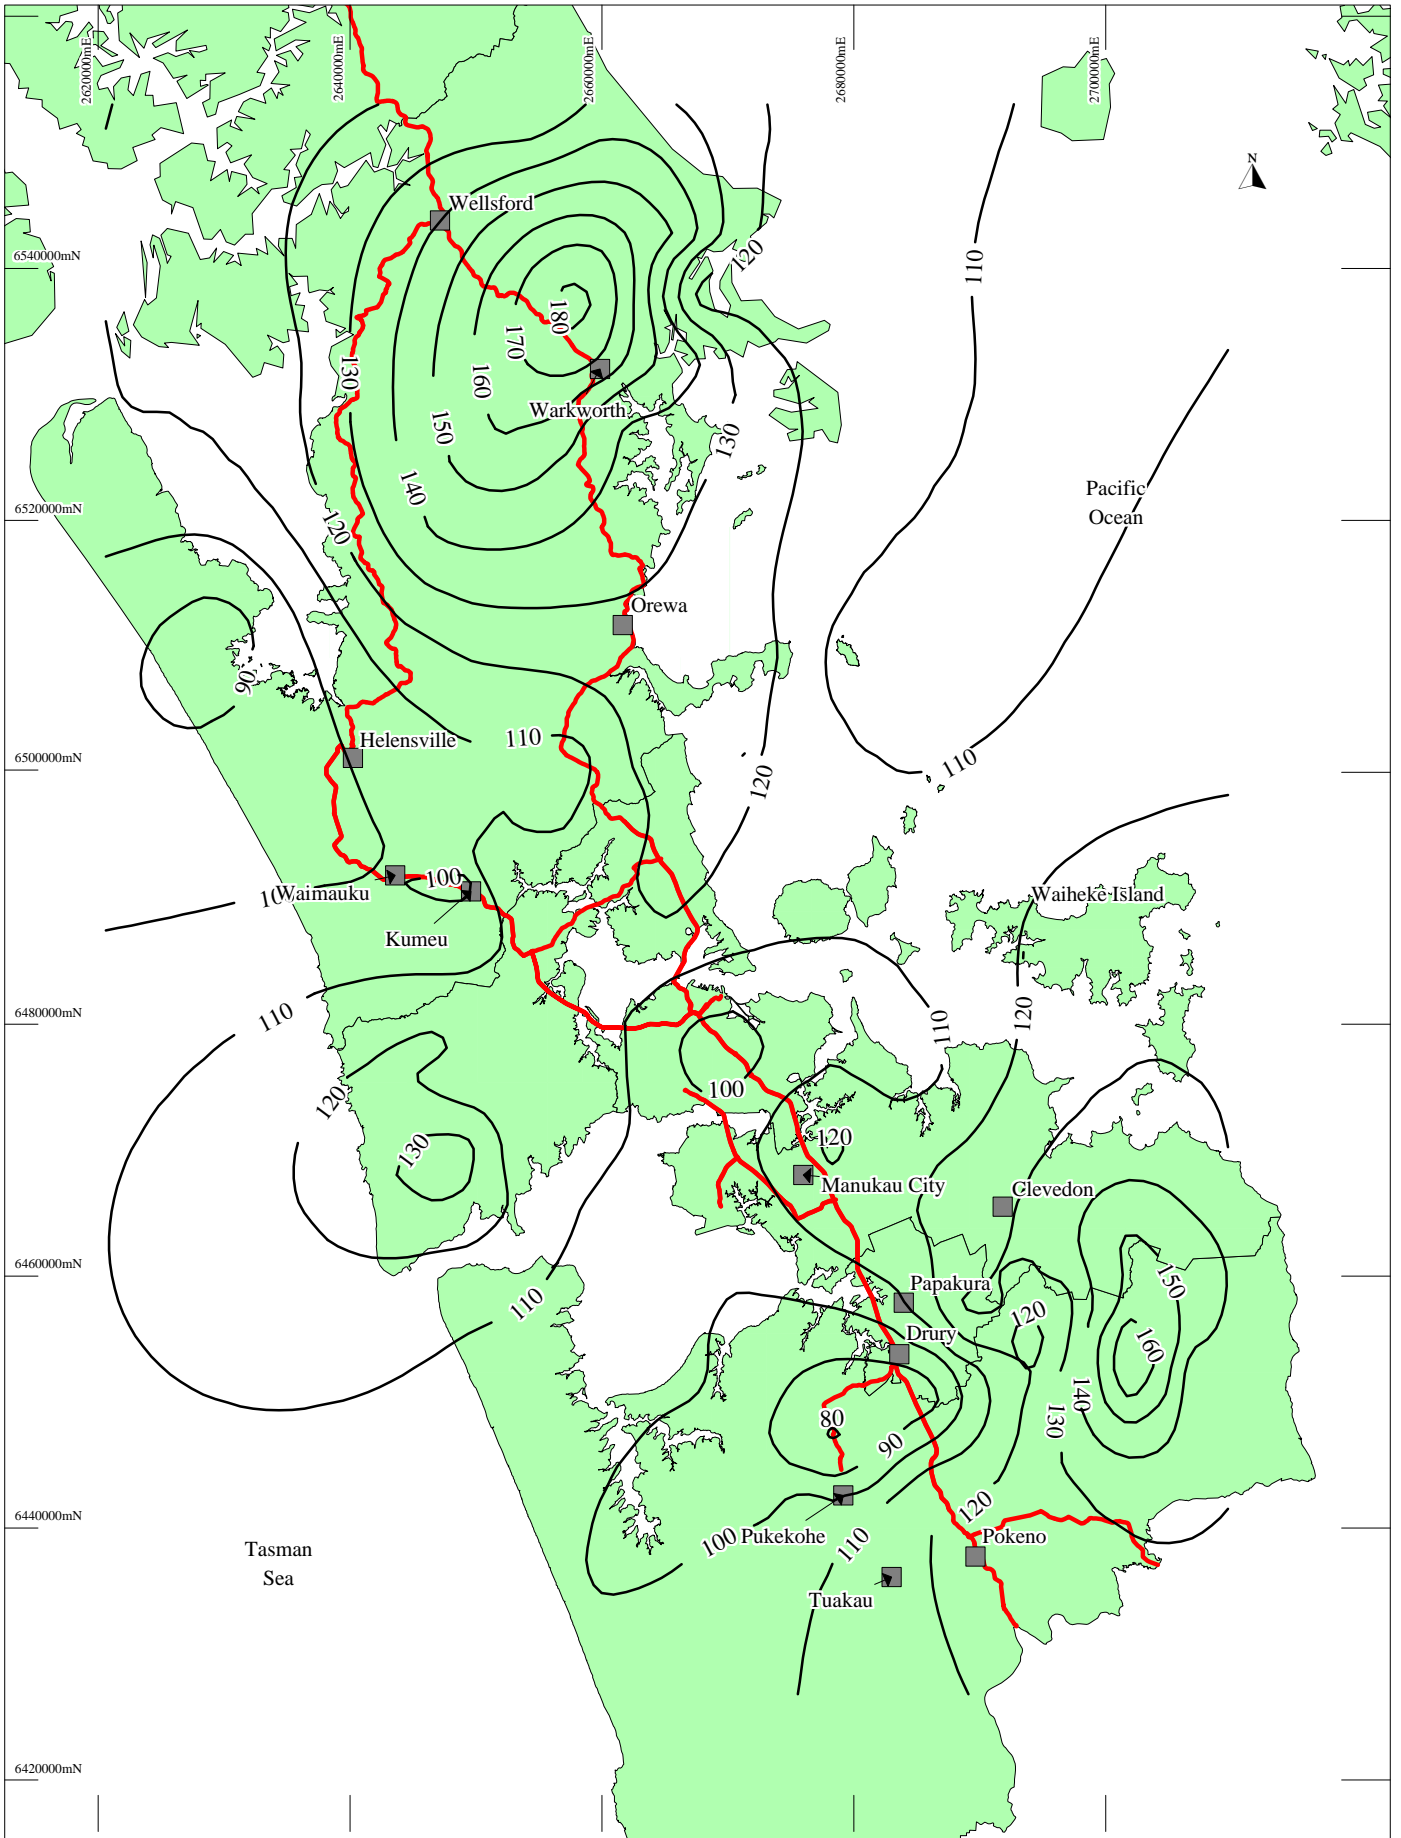

Workspace: N:(civil)\25\2507757\gis\mapinfo\wor\5year\wor Date: 25/08/1999

A




Auckland **Regional** Council

Legend: — 90 — Rainfall Contour (mm)
— State Highways

Figure A.2
5 Year ARI
Daily Rainfall Depth

Scale: 1:600,000 (at A4)

(Revised 25/08/1999)

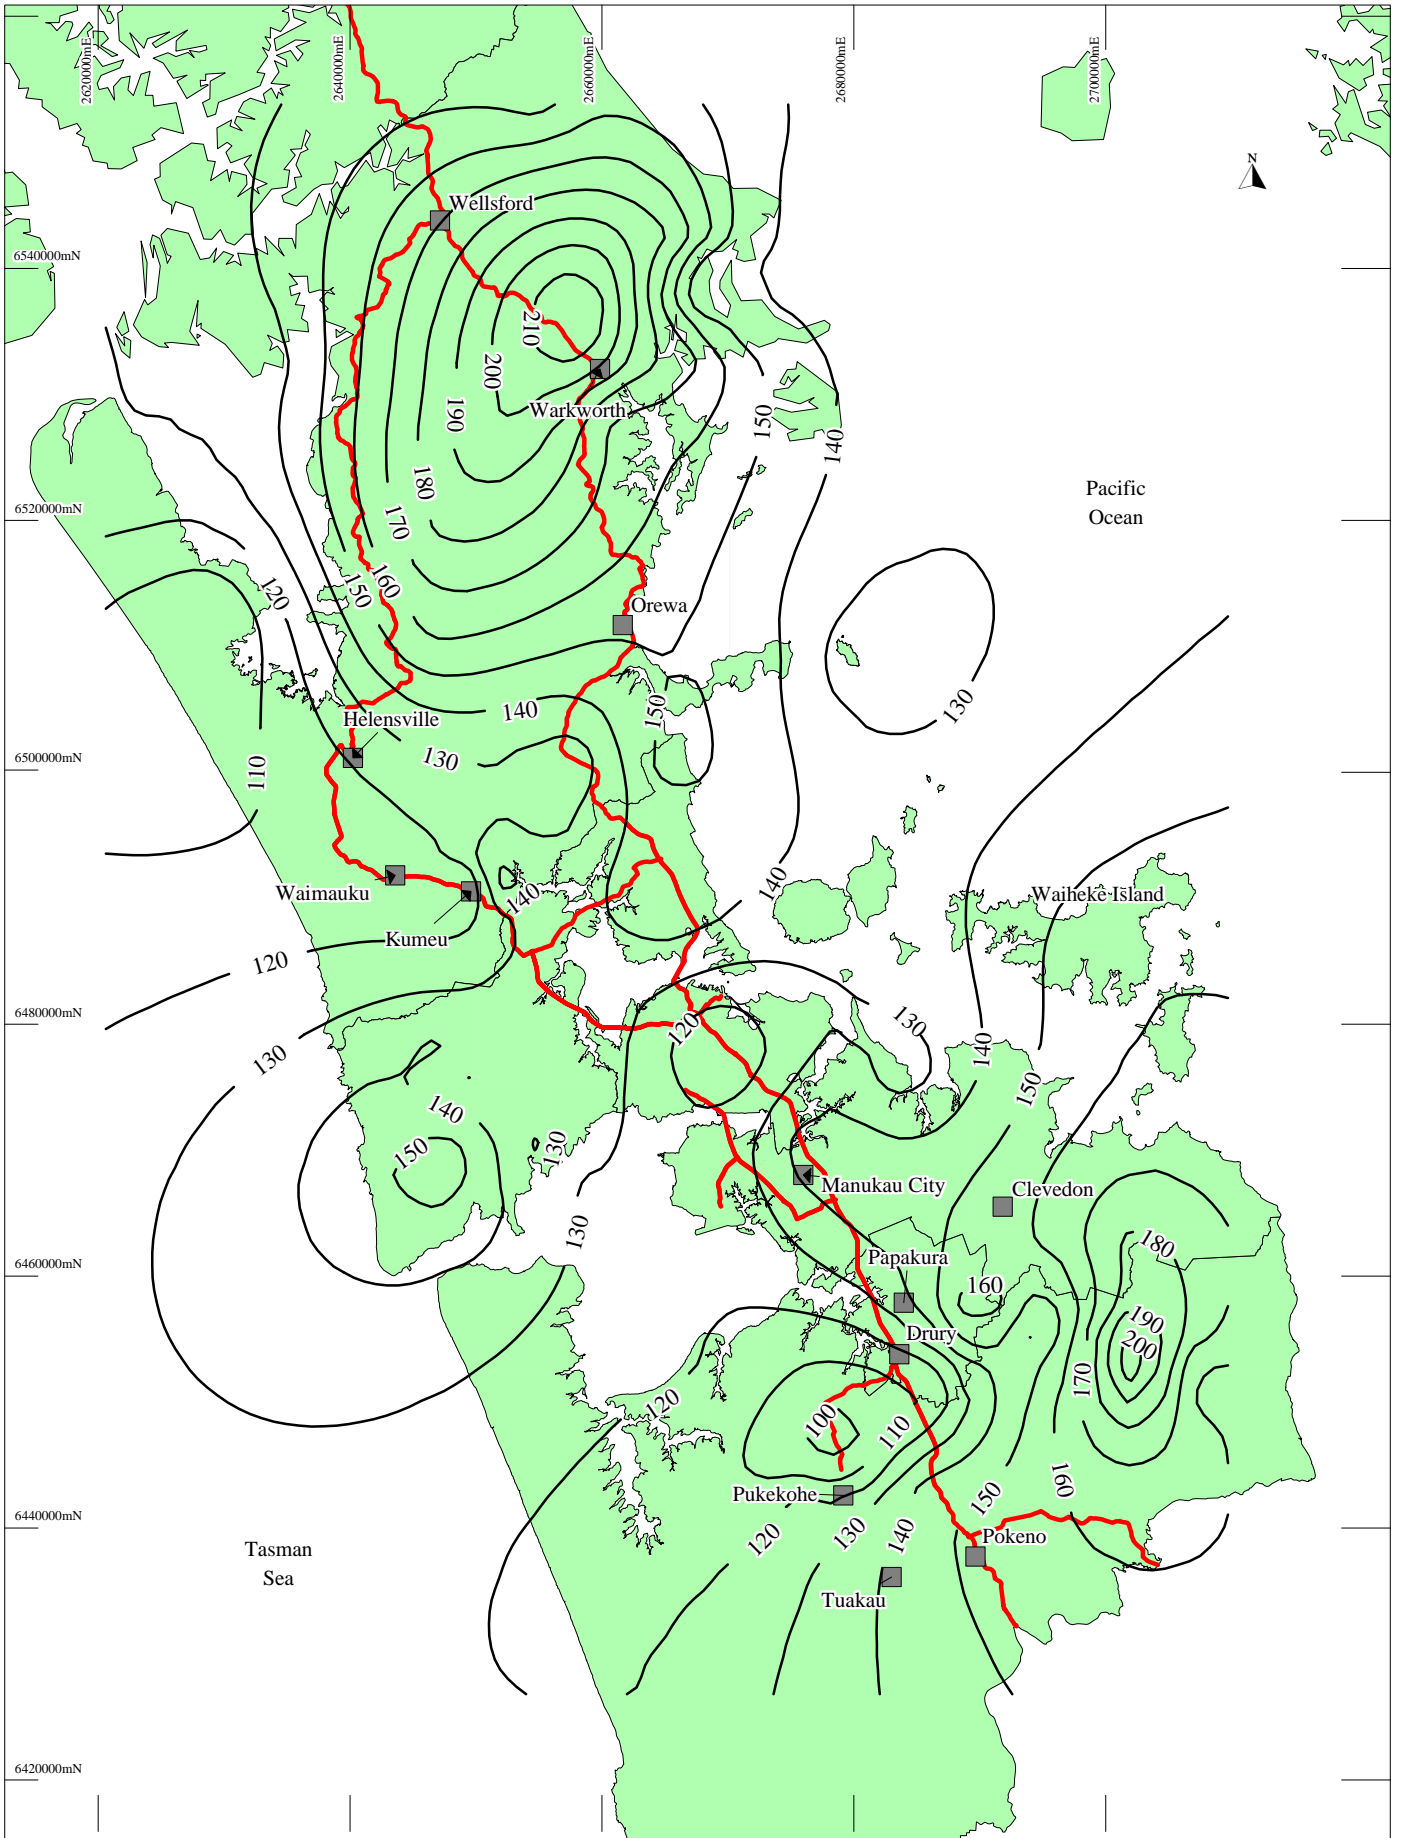

Workspace: N:(civil)\25\2507757\gis\mapinfo\wor\10yrari.wor Date: 25/08/1999

A




Auckland **Regional** Council

Legend: — 90 — Rainfall Contour (mm)
 — State Highways

Figure A.3
10 Year ARI
Daily Rainfall Depth

Scale: 1:600,000 (at A4)
 (Revised 25/08/1999)

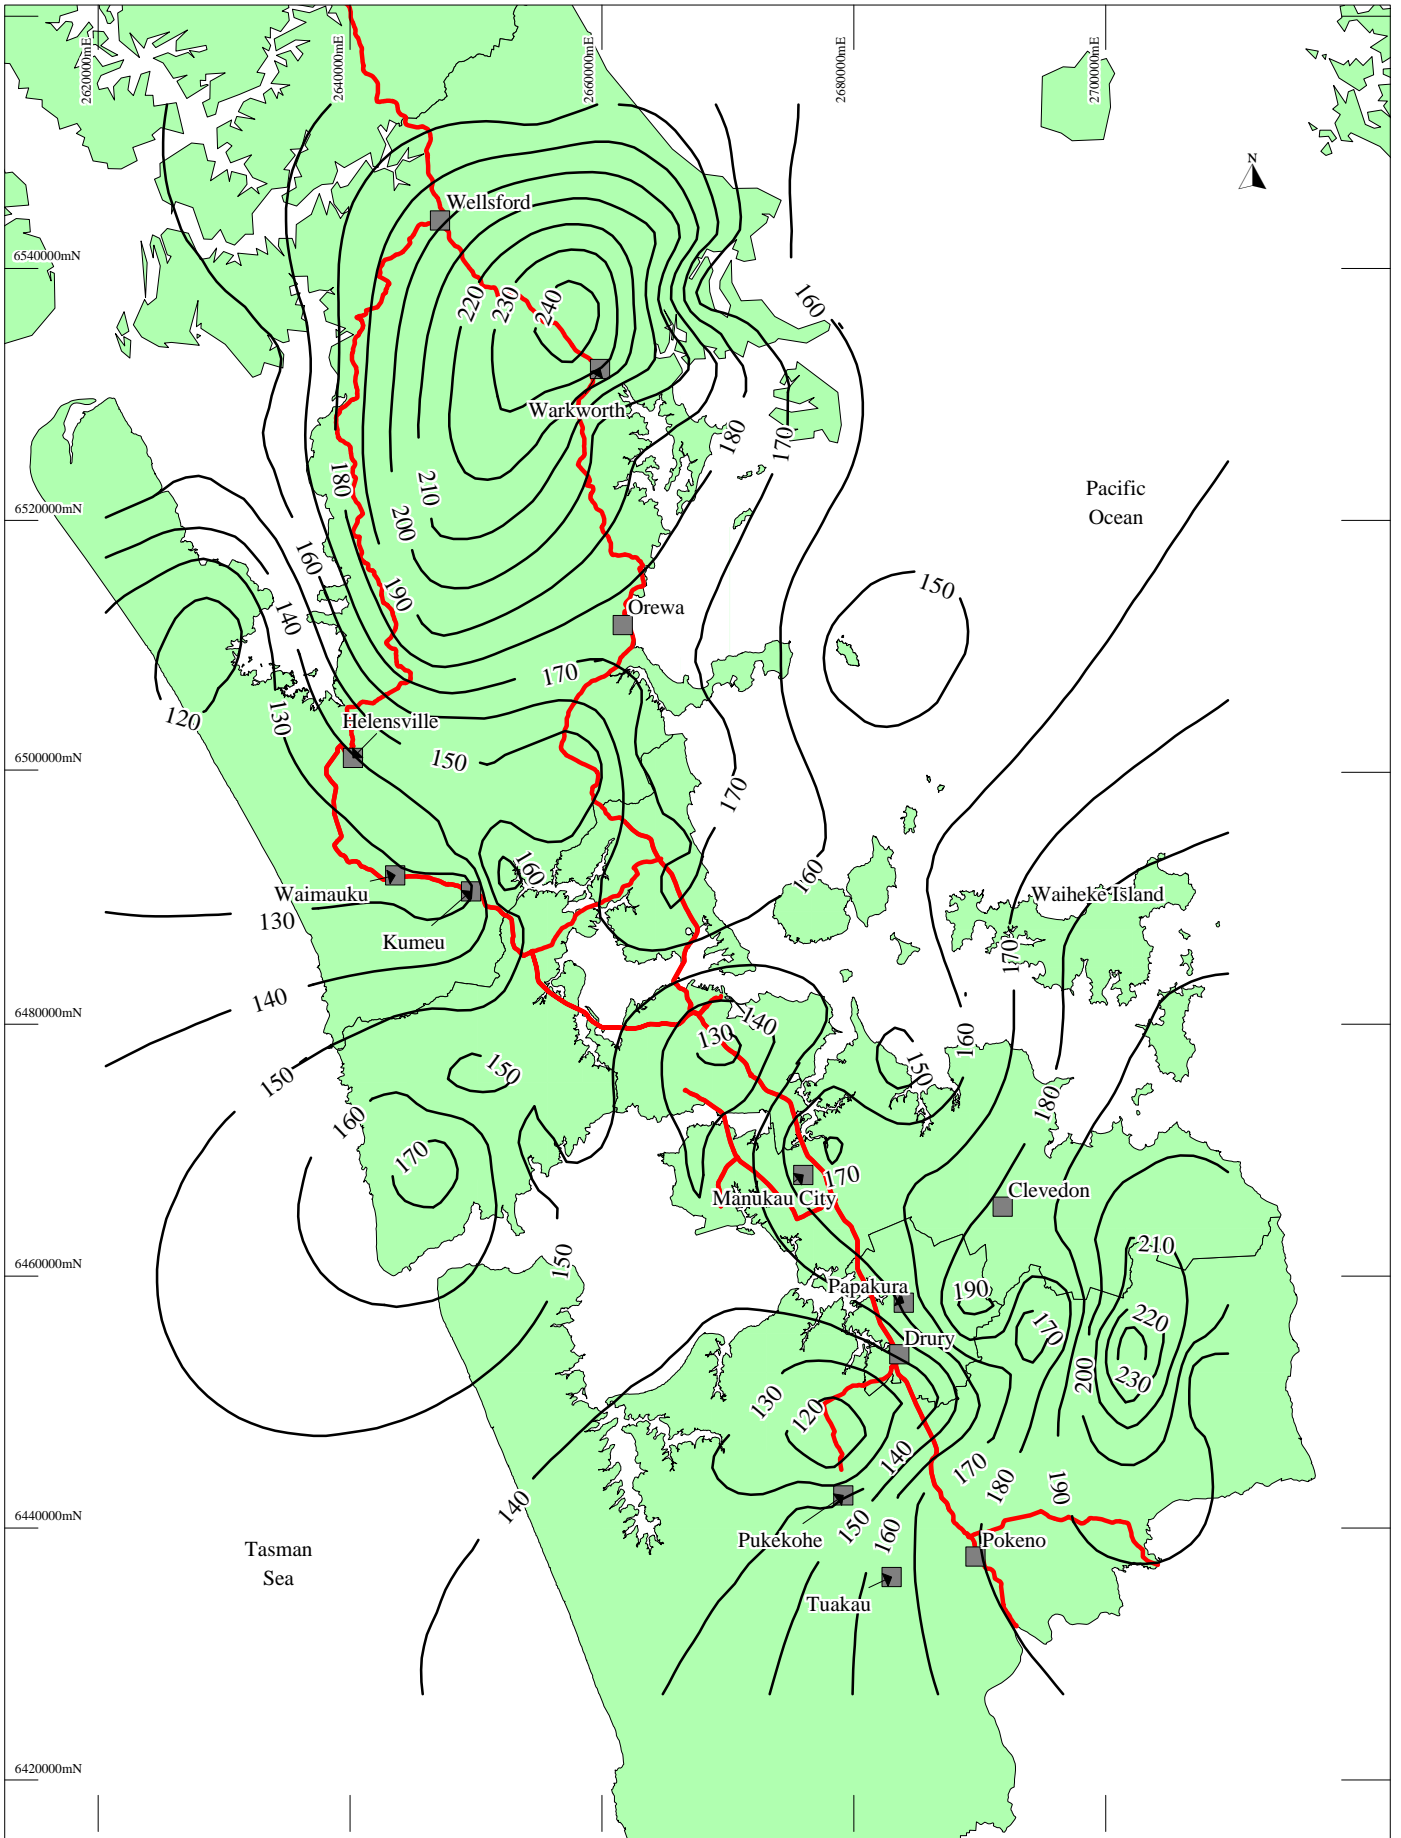

Workspace: N:(civil)\25\2507757\gis\mapinfo\wor\20\yrari_wor Date: 25/08/1999

A




Auckland **Regional** Council

Legend: — 90 — Rainfall Contour (mm)
 — State Highways

Figure A.4
20 Year ARI
Daily Rainfall Depth

Scale: 1:600,000 (at A4)
 (Revised 25/08/1999)

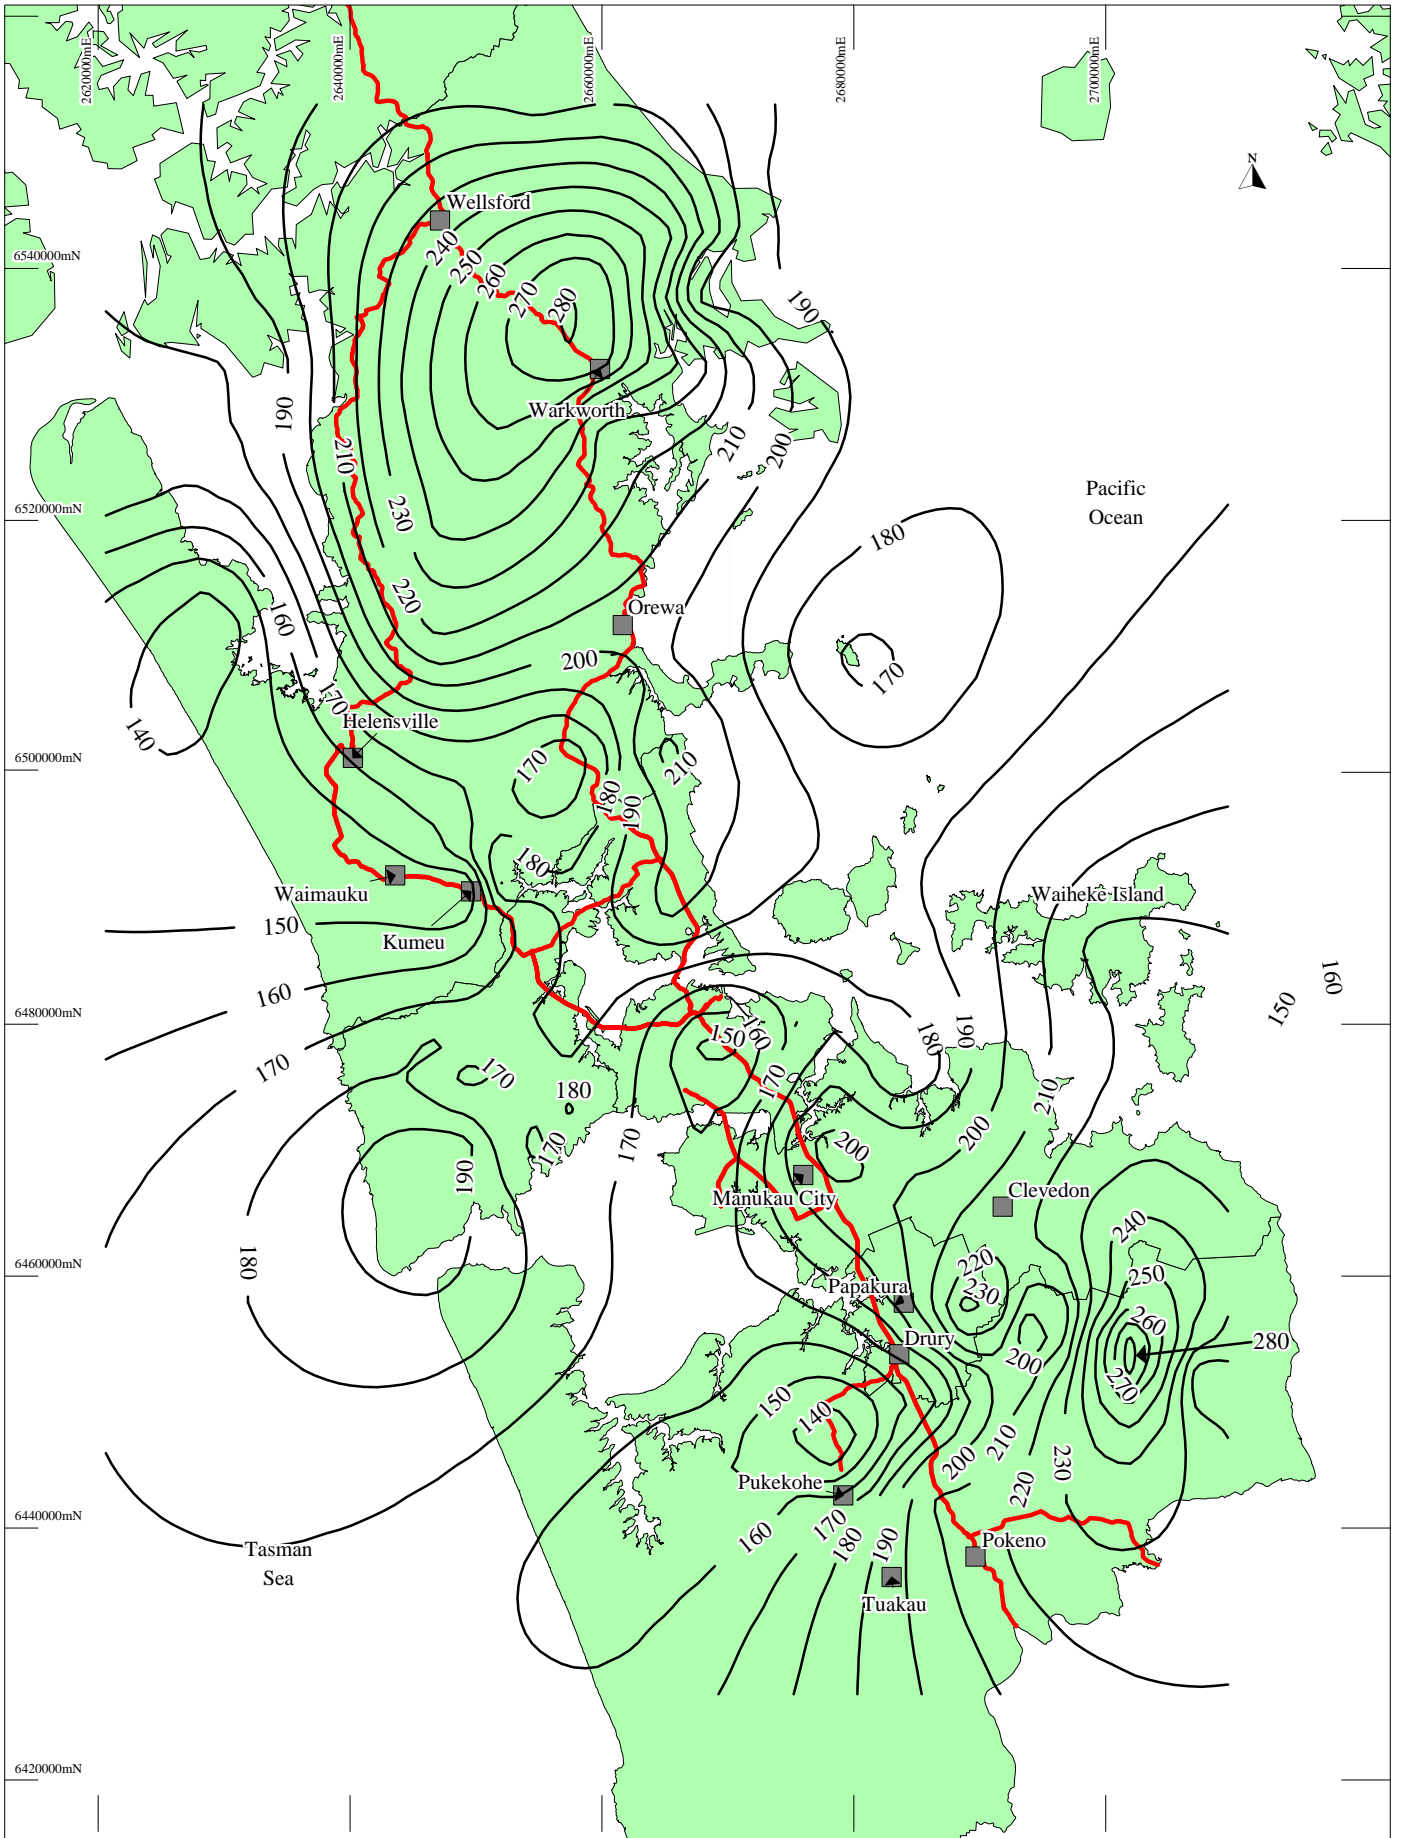

Workspace: N:(civil)\25\2507757\gis\mapinfo\wor\50yrari.wor Date: 25/08/1999

A




Auckland **Regional** Council

Legend: — 90 — Rainfall Contour (mm)
 — State Highways

Figure A.5
50 Year ARI
Daily Rainfall Depth

Scale: 1:600,000 (at A4)
 (Revised 25/08/1999)

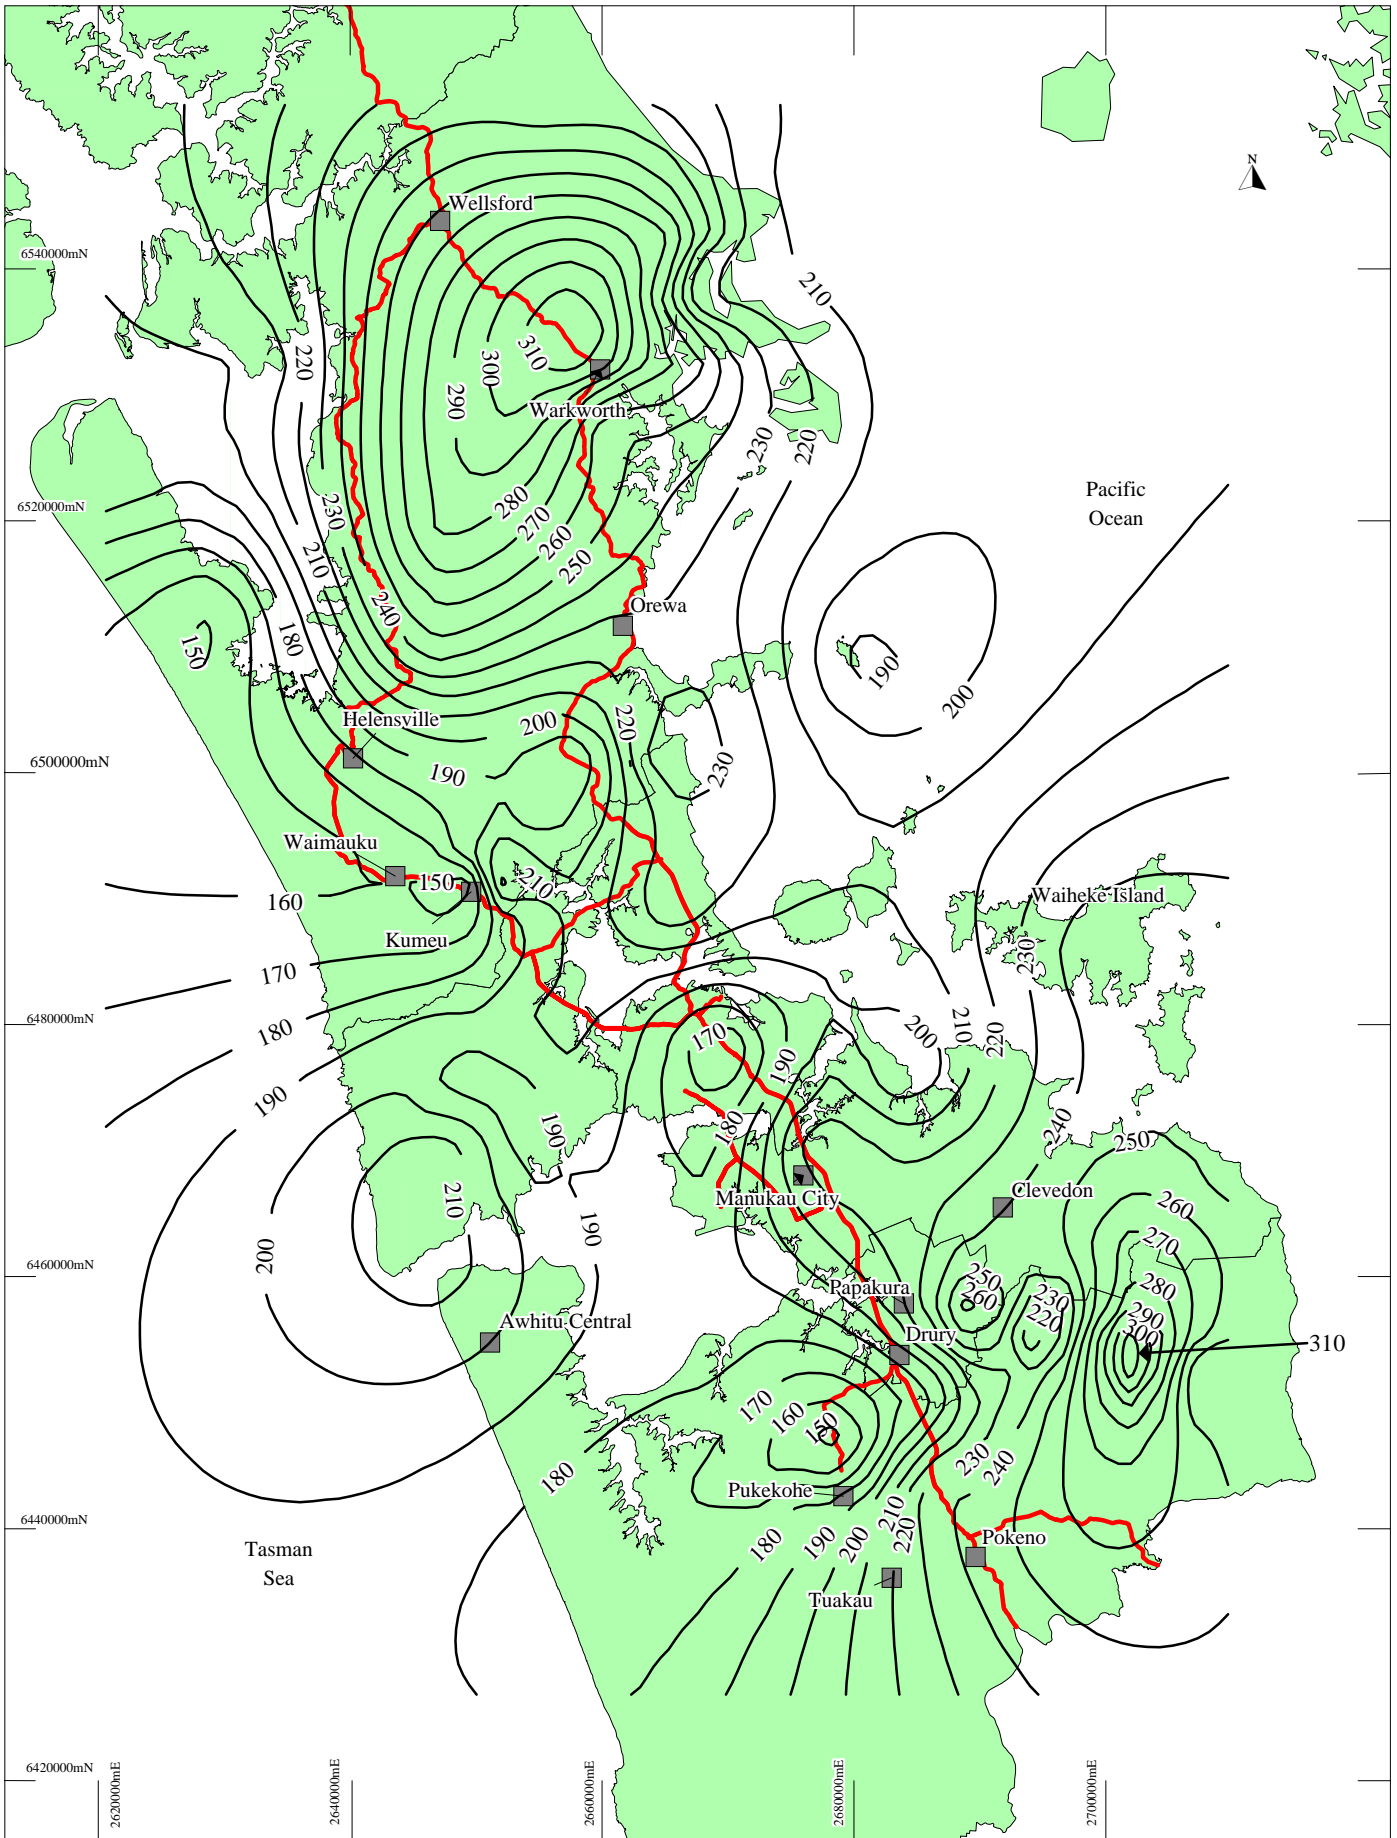

A



Auckland **Regional** Council

Legend: — 90 — Rainfall Contour (mm)
— State Highways

Figure A.6
100 Year ARI
Daily Rainfall Depth

Scale: 1:600,000 (at A4)

(Revised 25/08/1999)